



Arkeslight Stand, Light + Building 2018, Frankfurt (Germany) | Design: Francesc Rifé Studio | Photography: David Zarzoso - Fotografía de arquitectura



OLYMPIA





		P	CCT	I	Flux	LOR
OLYMPIA	A257-00- ① -1- W	10,5W	3000K	350mA	1550Lm	67%
	A257-00- ① -2- W	10,5W	4000K	350mA	1575Lm	67%

| 220/240 V~ | | **IP54** | **IK10** | CRI>90 | L80B10 >60.000h | | | | | |




		P	CCT	I	Flux	LOR
OLYMPIA Mini	A258-00- ① -1- W	5,5W	3000K	500mA	800Lm	63%
	A258-00- ① -2- W	5,5W	4000K	500mA	825Lm	63%

| 220/240 V~ | | **IP54** | **IK10** | CRI>90 | L80B10 >60.000h | | | | | |

① *OPTIONS

1	No DIM
2	DIM Push
3	DIM 1-10V
4	DIM DALI

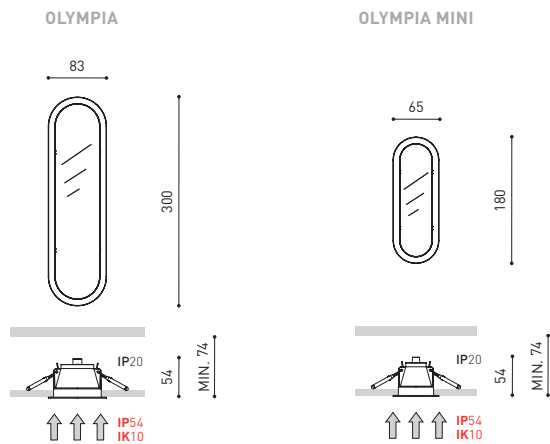

COLOUR | W □ | MATERIAL | AL | PC | PC |

RAL » 365

EASY CUT OUT INSTALLATION | TEMPLATE INCLUDED

& » PLEASE CONSULT