




Lynx Medium

Downlight
Adjustable

Also available




System Power	18W		26W	
CRI	>90Ra			
CCT	3000K	4000K PW	3000K	4000K PW
System Lumen	1807lm	1951lm	2469lm	2665lm
System Efficacy	100lm/W	108lm/W	95lm/W	103lm/W
LOR	Up to 80%			
Driver	Non-Dimmable Driver (included)			



PRODUCT LIST									
Article No.	Product Name	Color	System Lumen	CCT	CRI	System Power	Reflector	Cutout size	
2.11.4429	Lynx Medium	White	1807lm	3000K	>90Ra	18W	40°	Ø 146mm	
2.11.4430	Lynx Medium	White	1951lm	4000K PW	>90Ra	18W	40°	Ø 146mm	
2.11.4431	Lynx Medium	Black	2469lm	3000K	>90Ra	26W	40°	Ø 146mm	
2.11.4432	Lynx Medium	Black	2665lm	4000K PW	>90Ra	26W	40°	Ø 146mm	


Also available: CRI >80Ra
This is a small selection from our portfolio. Please contact us for a suitable solution for your lighting project.

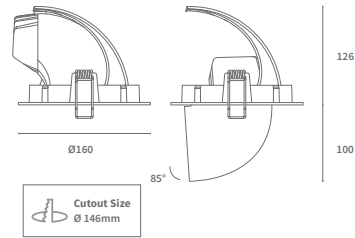

Lynx Medium 26W 3000K

H [m]	[lux]	Beam [Ø cm]
1	5244	70
2	1336	130
3	594	200
4	334	270
5	214	330

Beam (50%) Angle: 37° Field (10%) Angle: 69°



AVAILABLE BEAM ANGLES

Article No.	Description
5.14.0291	Reflector 15° for Lynx Medium
5.14.0292	Reflector 24° for Lynx Medium
5.14.0294	Reflector 55° for Lynx Medium

AVAILABLE DRIVERS

Article No.	Description
-----	Dimmable driver






Lynx Maxi

Downlight
Adjustable

Also available




System Power	36W		48W	
CRI	>90Ra			
CCT	3000K	4000K PW	3000K	4000K PW
System Lumen	3331lm	3587lm	4222lm	4548lm
System Efficacy	93lm/W	100lm/W	88lm/W	95lm/W
LOR	Up to 80%			
Driver	Non-dimmable Driver (included)			



PRODUCT LIST									
Article No.	Product Name	Color	System Lumen	CCT	CRI	System Power	Reflector	Cutout size	
2.11.4433	Lynx Maxi	White	3331lm	3000K	>90Ra	36W	40°	Ø 175mm	
2.11.4434	Lynx Maxi	Black	3587lm	4000K PW	>90Ra	36W	40°	Ø 175mm	
2.11.4436	Lynx Maxi	White	4222lm	3000K	>90Ra	48W	40°	Ø 175mm	
2.11.4435	Lynx Maxi	Black	4548lm	4000K PW	>90Ra	48W	40°	Ø 175mm	


Also available: CRI >80Ra
This is a small selection from our portfolio. Please contact us for a suitable solution for your lighting project.



Lynx Maxi 48W 3000K

H [m]	[lux]	Beam [Ø cm]
1	8766	70
2	2192	140
3	974	200
4	548	270
5	351	340

Beam (50%) Angle: 37° Field (10%) Angle: 72°



AVAILABLE BEAM ANGLES

Article No.	Description
5.14.0295	Reflector 15° for Lynx Maxi
5.14.0296	Reflector 24° for Lynx Maxi
5.14.0298	Reflector 60° for Lynx Maxi

AVAILABLE DRIVERS

Article No.	Description
-----	Dimmable driver

