

KURA REG

Installazione
Installation
Installation

Parete - Soffitto
Wall - Ceiling
Mur - Plafond

Materiali
Materials
Materiels

Materiale Corpo: Alluminio | Tipo di diffusore: Vetro serigrafato | Trattamento: Bordo mare
Material: Aluminium | Diffuser type: Serigraphed glass | Treatment: Sea treatment
Matériel du corps: Aluminium | Type de diffuseur: Verre sérigraphié | Traitement: Bord de mer

Alimentazione
Power supply
Alimentation

700mA - 6V | 220-240V



KURA REG
X2



COLOURS



Bianco RAL 9003
White RAL 9003
Blanc RAL 9003



Light Grey RAL 7044
Light Grey RAL 7044
Gris Pale RAL 7044




Dark Grey RAL 7021
Dark Grey RAL 7021
Gris Foncé RAL 7021



Corten
Corten
Corten

Kura Reg X2

IP65 IK 06 1J xx3 CE UK ER	LED			COL.	CODE *
	W	LM	REAL LM		
	4	360	310	220-240 V	LL14707W□□
					LL14707L□□
					LL14707D□□
					LL14707K□□
	4	360	310	700mA-6V	LZ14707W□□
					LZ14707L□□
					LZ14707D□□
					LZ14707K□□



* Complete the CODE ○ OPTIC S | 18° M | 28° L | 52° E | 11 X 37° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K


Accessori | Accessories | Accessoires

Alimentatori in corrente costante Kura

Drivers in constant current

Alimentations à courant constant

Prod	Spec	CC	N° max	IP	Code
Kura Reg x2	ON-OFF	700mA	1/2	20	LB1070071
Kura Reg x2	DALI	700mA	1/8	20	LB1070072
Kura Reg x2	1-10 PUSH	700mA	1/7	20	LB1070074




Convertitore Kura

Voltage-current converter Kura

Convertisseur tension-courant Kura

Prod	Spec	N° max	IP	Code
Kura Reg x2	24V - 700mA	3	20	LB1470001
Kura Reg x2	48V - 700mA	6	20	LB1470001







FEATURES



Inclinazione di 90°.
90° tilt.
Inclinaison à 90°.

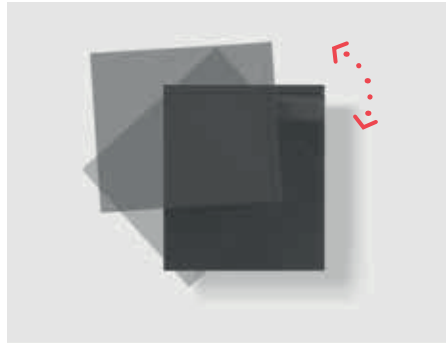

Rotazione di 210°
210° rotation.
Rotation à 210°.

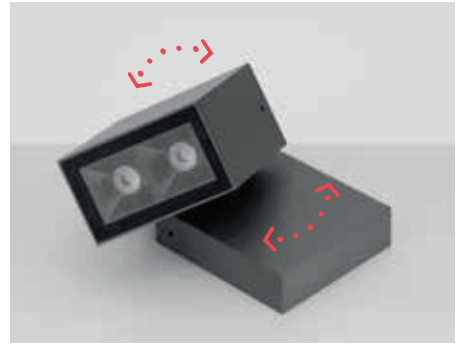

Rotazione e inclinazione combinate.
Combined rotation and tilting.
Rotation et inclinaison combinées.



KURA REG X2

