





>> MORE INFO

		P	CCT	Flux	LOR	L
<b>TRACK 48V + IND. LIGHT 1400</b>	A466-01-20-   NT   WT	18,3W	2700K	2320lm	70%	1402mm
	A466-01-21-   WT   NT	18,3W	3000K	2380lm	70%	1402mm
	A466-01-22-   WT   NT	18,3W	4000K	2585lm	70%	1402mm
<b>TRACK 48V + IND. LIGHT 2800</b>	A466-02-20-   WT   NT	39,2W	2700K	5210lm	70%	2802mm
	A466-02-21-   WT   NT	39,2W	3000K	5360lm	70%	2802mm
	A466-02-22-   WT   NT	39,2W	4000K	5820lm	70%	2802mm


48 V | III | IP20 | CRI>90 | L90B5 >50.000h




**TRACK 48V + INDIRECT LIGHT 1400 / 2800**



**Indirect Light Suspension kit 48V (2 units)**  
A466-00-03- | NT | WT |



**Suspension straight joiner kit 48V**  
A466-00-04- | NT | WT |



**Suspension 90° Corner joiner kit 48V**  
A466-00-05- | NT | WT |  
\*Electrical connection not included.


**DROP VOLTAGE TABLE**

POWER (W)	CABLE SECTION (mm <sup>2</sup> )	CABLE LENGTH (m)			
		5	10	20	30
100	0,75	50	50	X	X
	1,5	50	50	40	25
150	0,75	40	15	X	X
	1,5	50	40	20	X


For calculations, you must consider indirect light power.

	P	V	D (A x B x C)
<b>CONSTANT VOLTAGE LED POWER SUPPLY</b>			
0434-01-61*   N	100W	48V	298 x 19 x 16mm
0434-01-62	150W	48V	350 x 30 x 18mm

220 V~ | \*To be installed inside the track.

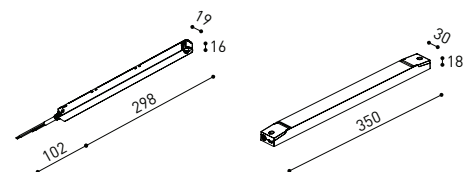


COLOUR | NT ■ | N ■ | WT □ | MATERIAL | AL | PC |




Live-End Connector 48V

A338-00-01- | N | W |



L-JOINT Connector 48V

A338-00-12- | N | W |




Corner 90° Connector One Plane 48V

A338-00-24- | N | W |




End 48V

A338-00-06- | NT | WT |




Central Connector 48V

A338-00-02- | N | W |



Wireless Control 48V

0434-01-31- | N | W | Casambi/AAG Stucchi App




Cover Gap 1m 48V

A338-00-30- | N | W |



End Feed 48V

A338-00-07- | NT | WT |




Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150W NO DIM

A338-00-26- | NT | WT | 150W DIM

220 V~  
240 V~  
INCL



Suspension Feed Kit

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM


For remote power supply

A338-00-27- | N | W | NO DIM


A338-00-28- | N | W | DIM

For power supply inside the track


**MAINS TRIMLESS**



**MAINS THICK TRIMLESS**



**STEEL CABLE TRIMLESS**



**WIRE TRIMLESS ACCESSORIES**

**FEED**


**Mains Trimless\***

A023-00-01- | W | N |



**Mains Thick Trimless\***

A023-00-02- | W | N |

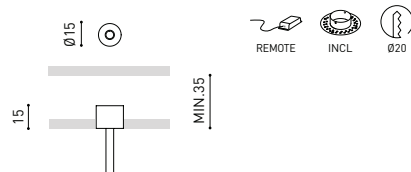

**FASTENING**

**Steel Cable Trimless\***

A023-00-05- | W | N |



COLOUR | WT □ | NT ■ | W □ | N ■ |

MATERIAL | AL □ | PC □ |

\* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

» PLEASE CONSULT





48V SYSTEM

# WIZ 48V



>> MORE INFO

WIZ 48V	+RE	P	CCT	I	Flux	LOR
A465-0- ∞ -10-   WT   NT   WTW   NTW   -S		12,4W	2700K	350mA	1470 lm	86%
A465-0- ∞ -11-   WT   NT   WTW   NTW   -S		12,4W	3000K	350mA	1530 lm	86%
A465-0- ∞ -12-   WT   NT   WTW   NTW   -S		12,4W	4000K	350mA	1550 lm	86%

48 V | III IP20 | CRI>90 | L80B10 >60.000 h



∞	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A4650110WT
-S	Track 48V Short	A4650110WT-S


### OPTIONAL

#### WIZ High Chromatic LED

NOT SOLD SEPARATELY  
AFFECTS THE LIGHTING PARAMETERS


FINISHING	Body	Lampshade	Adaptor
WT	WT □	N ■	N ■
NT	NT ■	N ■	N ■
WTW	WT □	N ■	W □
NTW	NT ■	N ■	W □

WIZ 48V



WIZ 48V SHORT (-S)

VISIBLE LIMIT



COLOUR | WT □ | NT ■ | W □ | N ■ |

MATERIAL | AL | ABS+PC |

\* OTHER DIM OPTIONS PLEASE CONSULT

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

48V SYSTEM

# LINE 48V



>> MORE INFO


		P	CCT	I	Flux	LOR
LINE 500 48V	A376-10- ① -0-   N   WT	10,5W	2700K	350mA	1500 lm	65%
	A376-10- ① -1-   N   WT	10,5W	3000K	350mA	1600 lm	65%
	A376-10- ① -2-   N   WT	10,5W	4000K	350mA	1650 lm	65%
LINE 1000 48V	A376-20- ① -0-   N   WT	21W	2700K	700mA	3000 lm	65%
	A376-20- ① -1-   N   WT	21W	3000K	700mA	3200 lm	65%
	A376-20- ① -2-   N   WT	21W	4000K	700mA	3300 lm	65%
LINE 2000 48V	A376-30- ① -0-   N   WT	42W	2700K	700mA	6000 lm	65%
	A376-30- ① -1-   N   WT	42W	3000K	700mA	6400 lm	65%
	A376-30- ① -2-   N   WT	42W	4000K	700mA	6600 lm	65%

48 V | III IP20 | CRI>90 | L80B10 >40.000 h



① \*OPTIONS

1	No DIM
2	DIM DALI

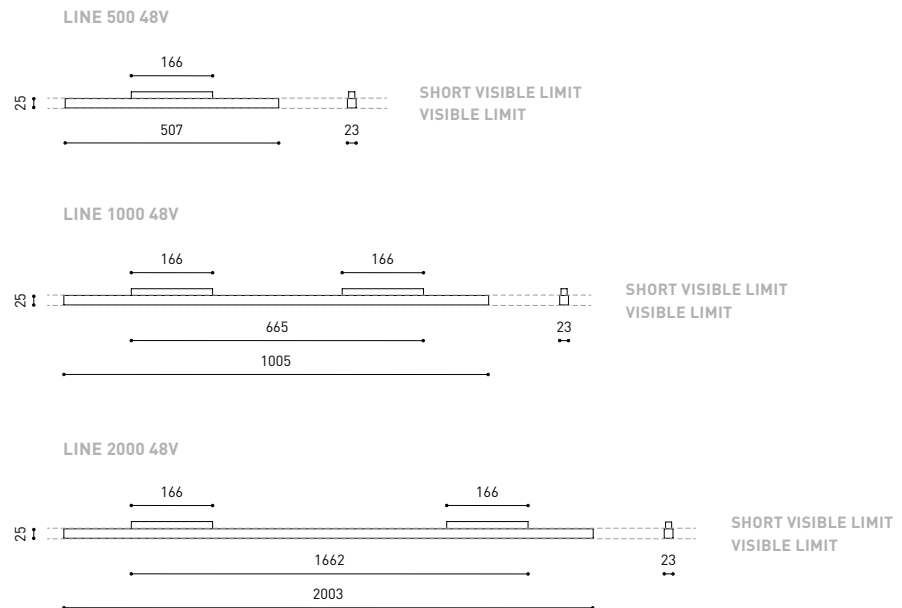

COLOUR | N ■ | WT □ | MATERIAL | AL | PC |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

☎ » PLEASE CONSULT