









LED SECURE




APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



Temperatura ambiente: -25 a +45°C.
Ambient working temperature: -20 a +45°C.
Température de travail : -25 a +45°C.

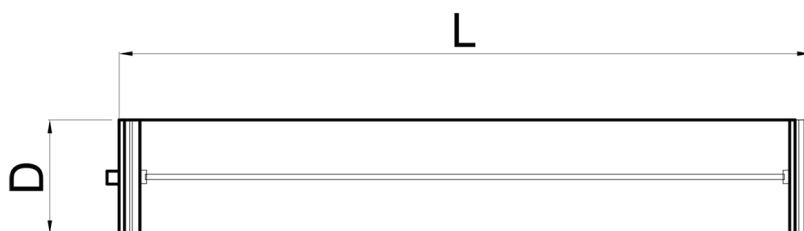


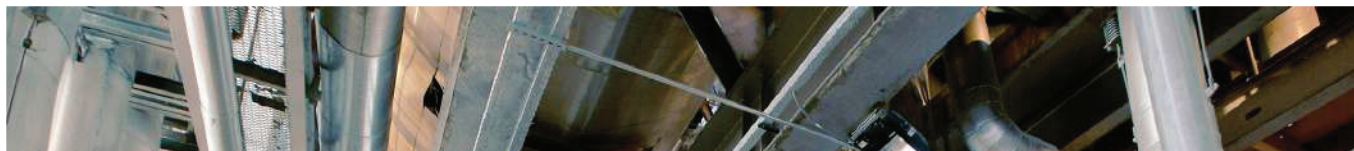

RG1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 72.000	IP68-2 IK10	CE	2014/34/EU II 3GD Ex nR II C T6 Gc Ex tc IIIC T85°C Dc
-----	----------------	------------	-------	-----------------------	----------------	----	---



Ref.	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sortant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
LS113	13	1.490	997	3.000	727	83	133	1
LS114	13	1.550	1.037	4.000	727	83	133	1
LS123	16	2.560	1.712	3.000	727	83	133	1
LS124	16	2.670	1.786	4.000	727	83	133	1
LS213	24	2.980	1.993	3.000	1.337	83	133	1
LS214	24	3.200	2.140	4.000	1.337	83	133	1
LS223	32	5.120	3.424	3.000	1.337	83	133	1
LS224	32	5.340	3.571	4.000	1.337	83	133	1
LS313	29	3.720	2.488	3.000	1.637	83	133	1
LS314	29	4.000	2.675	4.000	1.637	83	133	1
LS323	40	6.310	4.220	3.000	1.637	83	133	1
LS324	40	6.700	4.481	4.000	1.637	83	133	1

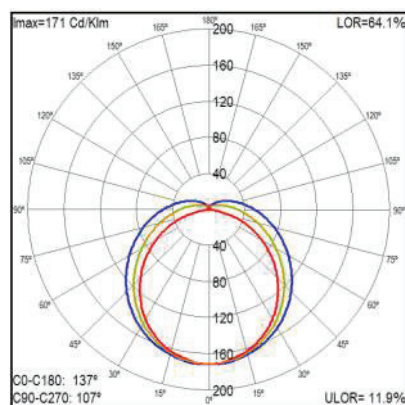



RG1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IP68-2 IK10	CE	2014/34/EU II 3GD Ex nR II C T6 Gc Ex tc IIIC T85°C Dc
-----	----------------	------------	-------	-----------------------	----------------	----	---



ACCESORIOS LED SECURE / LED SECURE ACCESORIES / ACCESSOIRES LED SECURE



Ref. **Q0349**
Suspensión con cable de acero
 Steel cable suspension
Suspension avec câble en acier



Ref. **Q0401**
Bridas de acero inoxidable
 Stainless steel clamps
Colliers inox antivandalisme



Ref. **Q0156**
Bridas de acero inoxidable de apertura rápida
 Quick opening stainless steel clamps
Colliers inox de ouverture rapide à grenouillère



Ref. **Q0159**
Bridas de acero cincado
 Zinc-plated steel clamps
Colliers en acier galvanisé



Ref. **Q0147**
Pieza anticavitación
 Anticavitation piece
Kit anti-cavitation



Ref. **Q0153**
Brida policarbonato anti vandálica
 Anti-vandalic PC clamp
Colliers en polycarbonate



Ref. **Q0978**
Sujeción a báculo
 Pole adapter
 Adaptateur de lampadaire



EMERGENCY
1h/3h

LÍNEA CONTINUA
 CONTINUOUS LINE CONNECTION
 CÂBLAGE TRAVERSANT

EX624 3 polos / 3 poles / 3 pôles

EX625 5 polos / 5 poles / 5 pôles

Ref. **Q0978**
Sujeción a báculo
 Pole adapter
 Adaptateur de lampadaire

