


SOUL LED



SIMBOLOGIA / SIMBOLGY pag. 8-9

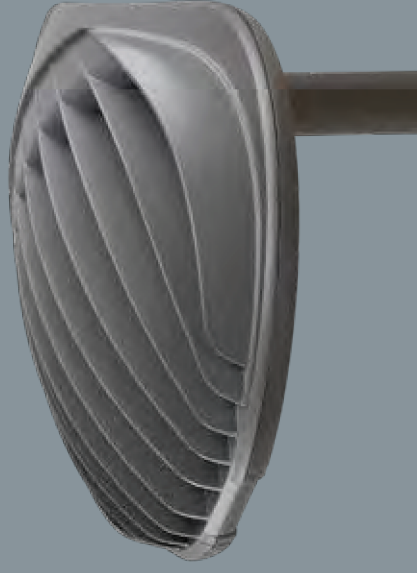

CE

IP66

IK08

ta
-35 / +45

1-10V



CRI ≥ 80

0,085m²
Lateral view

0,174m²
Front view



C5 available



3 YEARS
ANN
WARRANTY

COLORI DISPONIBILI / AVAILABLE COLOURS


3 COLORE STANDARD
STANDARD COLOUR

Antracite
Anthracite

OPZIONI DI INSTALLAZIONE / INSTALLATION OPTIONS



VERSIONI DISPONIBILI / AVAILABLE VERSIONS




CCT 4000K
COLORE STANDARD
STANDARD COLOUR



TEMPERATURA COLORE DISPONIBILE / COLOUR TEMPERATURE AVAILABLE pag. 136

DIMENSIONI / DIMENSIONS

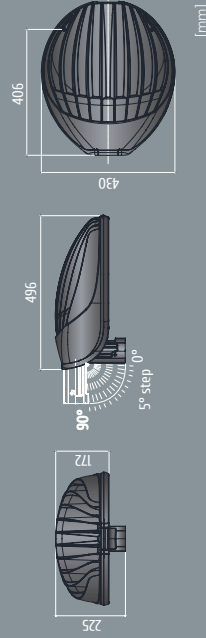

DIMENSIONI IMBALLO / PACKING DIMENSIONS

m³ 0,048
500x445x215mm



DISPONIBILE A RICHIESTA / AVAILABLE ON REQUEST

- driver DALI e riduzione di flusso con sistema Vmidnight;
- SPD 10kV;
- verniciatura speciale: colore e tipologia di finitura (C5).
- DALI driver and output reduction with Vmidnight system;
- SPD 10kV;
- special paintwork: colour and type of coating (C5).

ACCESSORI / ACCESSORIES

- adattatore per palo Ø 40 e 76mm;
- braccio da parete/angolo Ø 60mm.
- pole adapter Ø 40 and 76mm;
- angle/wall bracket Ø 60mm.

Armatura stradale a LED, elegante e moderna, sviluppata per l'illuminazione di centri urbani e residenziali. Ideale per strade, parcheggi, piazzali e giardini.

Corpo, copertura integrale e attacco palo: pressofusione di alluminio.

Attacco palo: adatto per pali Ø 60 mm.

Verniciatura: polvere di poliestere termoidurente, previo trattamento di sgrassaggio e fosfocromatazione in grado di garantire un'altissima resistenza agli agenti chimici ed atmosferici.

Vetro di sicurezza: extra chiaro temprato 4 mm.

LED: Samsung LH181B, CRI>80, CCT 4000K, SDCM 3.

Mantenimento del flusso luminoso: 109.000h L90 B10 @ta25, 83.000h L80 B10 @ta45.

Lente: cluster multiplo in PMMA Anti UV UL94 stradale e verticale di asimmetria a 30°.

Alimentazione: elettronica 220 ÷ 240V 50/60Hz, protezione alla scarica sino a 6/8-10kV.

LED roadway lighting fixture, an elegant and modern solution for urban and residential lighting. Ideal for streets, parking lots, forecourts and gardens.

Housing, integral cover and pole mounting: die-cast aluminium.

Pole mounting: suitable for Ø 60 mm.

Paintwork: thermosetting polyester powder, prior degreasing and phosphochromatizing process that will ensure an extremely high resistance to chemical and atmospheric agents.


Safety glass: extra clear tempered 4 mm.

LED: Samsung LH181B, CRI>80, CCT 4000K, SDCM 3.

Lumen maintenance: 109.000h L90 B10 @ta25, 83.000h L80 B10 @ta45.

Lens: multiple cluster in PMMA Anti UV UL94 road lens with asymmetry vertex at 30°.

Power supply: 220 ÷ 240V 50/60Hz with electronic ballast, surge protection up to 6/8-10kV.

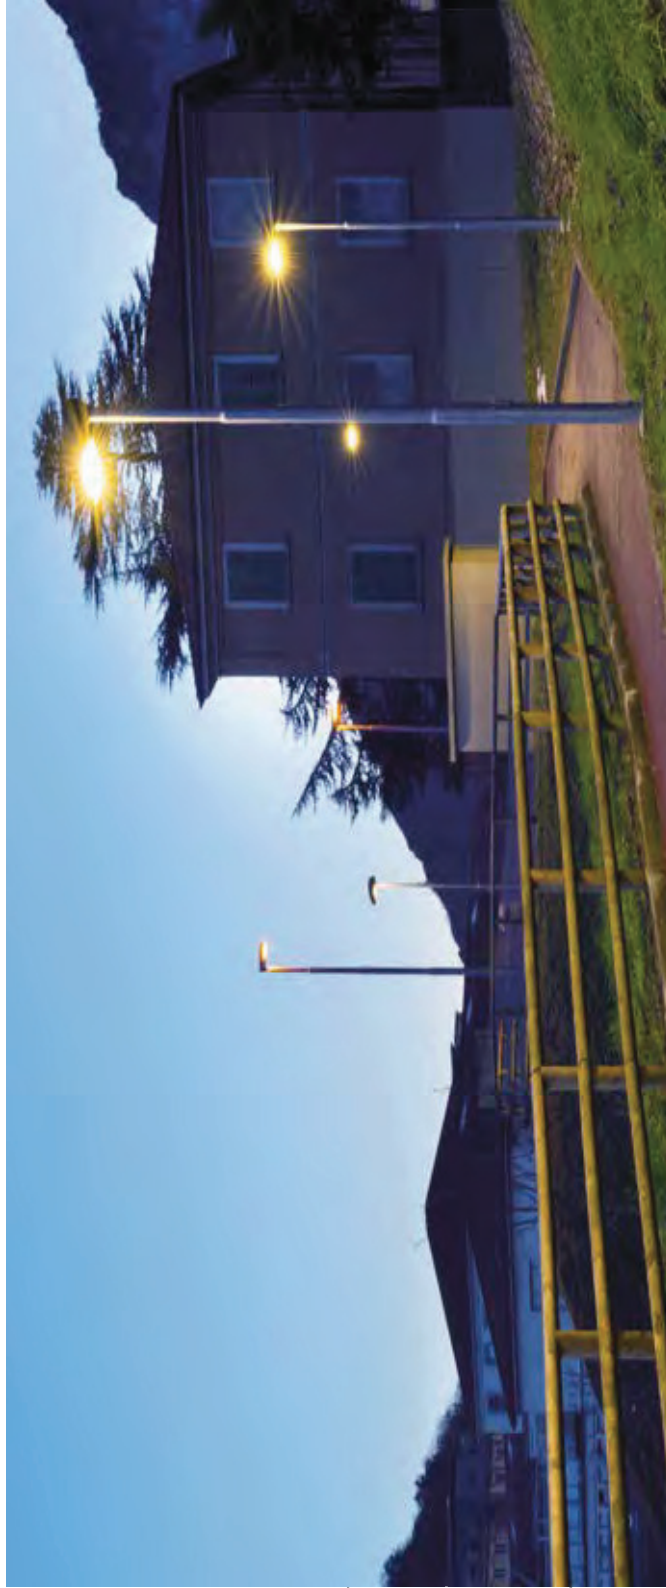

CODICE Code	DESCRIZIONE Description	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	CORRENTE Current(mA)	SPD Spd(kV)	PESO NETTO Net weight(kg)
----------------	----------------------------	---------------------	-------------------------------------	--------------------------------	-------------------------	----------------	------------------------------

505643.104	1 LM 840	35W	5200	4475	700	6/8	13,00
505643.208	2 LM 840	70W	10400	8945	700	6/8	13,08
505643.312	3 LM 840	105W	15600	13420	700	6/8	13,26
505643.416	4 LM 840	140W	20800	17890	700	6/8	13,35
505643.520	5 LM 840	175W	26000	22360	700	6/10	13,85

code + DALI Driver dimmerabile DALI | DALI dimmable driver

code + VM Driver dimmerabile Vmidnight | Vmidnight dimmable driver

900000.000 SPD 10kV CLII integrato con Cut/Off | SPD 10kV CLII embedded with Cut/Off

950000.000 Braccio da parete | wall bracket Ø 60mm

950000.003 Adattatore palo | pole adapter Ø 40mm

950000.006 Adattatore palo | pole adapter Ø 76mm



ACCESSORIES

ACCESSORI / ACCESSORIES




● **Vento**
Adattatore palo Ø 40-42mm
Pole adapter Ø 40-42mm

950800.040


● **Skyline**
Adattatore palo Ø 40-42mm
Pole adapter Ø 40-42mm

950600.040

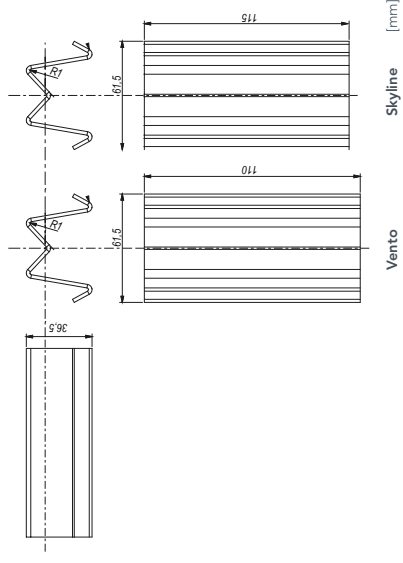

● **Vento / Skyline / Soul Led**
Adattatore palo Ø 76 mm
Pole adapter Ø 76 mm

950000.006

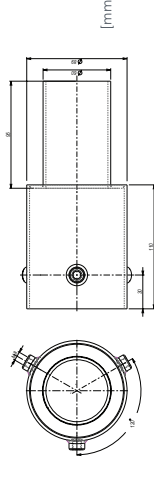


● **Vento**
Adattatore palo Ø 48-50mm
Pole adapter Ø 48-50mm

950800.050


● **Skyline**
Adattatore palo Ø 48-50mm
Pole adapter Ø 48-50mm

950600.050

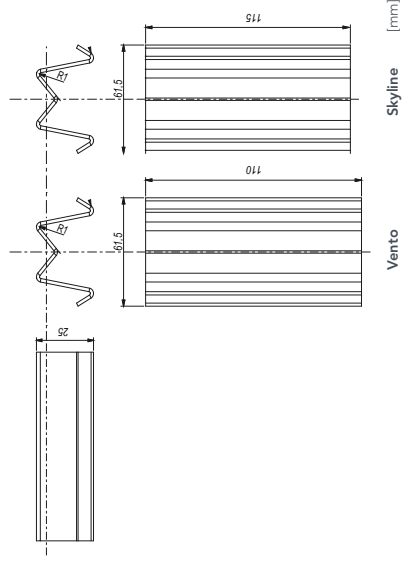

● **Vento / Skyline / Soul Led**
Braccio da parete/angolo Ø 60 mm
Angle/wall bracket Ø 60 mm

950000.000

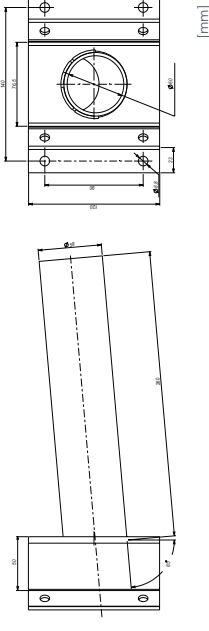

● **Soul Led**
Adattatore palo Ø 40 mm
Pole adapter Ø 40 mm

950000.003

