




## Bari DLK NT IP44 LED



Downlight for surface installation. Version DLK with square frame complements the series of round BARI luminaires

**Materials:** Powder painted, white aluminum ring, steel sheet body. Tempered glass: transparent SH or matt SH MAT. Reflector made of polished aluminum with a purity of 99.85 %.

**Installation:** surface mounted

**Power:** 230 V

### ELECTRICAL DATA

Light source	LED
Voltage rating	220 ... 240 V
Power factor	0.96

### MECHANICAL DATA

Housing material	Steel sheet
------------------	-------------

### INFORMATION

Colour	White
--------	-------

### CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
Light source protection	Yes
PZH	Yes
HACCP+	Yes
EAC	Yes
Power Flicker	=< 3%

### LIGHT DATA

Luminaire's luminous efficiency	74 %
Color rendering index	84
Light distribution	DI
Beam angle	60 °
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 60000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	91 %

### OPTICAL DATA

Reflector	High gloss
-----------	------------


### AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Light source luminous flux [lm]	Luminaire luminous flux [lm]	Light source luminous efficacy [lm/W]	Luminaire's luminous efficacy [lm/W]	Colour temperature
DJ001.1189.830.A000 PX4089700	15	SH	1970	1600	164	107	3000K
DJ001.1189.840.A000 PX4089721	15	SH	2030	1640	169	109	4000K
DJ002.1189.830.A000 PX4089707	21	SH	2730	2210	152	105	3000K

## AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Light source luminous flux [lm]	Luminaire luminous flux [lm]	Light source luminous efficacy [lm/W]	Luminaire's luminous efficacy [lm/W]	Colour temperature
DJ002.1189.840.A000 PX4089728	21	SH	2810	2270	156	108	4000K
DJ003.1189.830.A000 PX4089714	29	SH	3720	3010	143	104	3000K
DJ003.1189.840.A000 PX4089735	29	SH	3820	3090	147	107	4000K
DJ001.1188.830.A000 PX4089742	15	SH MAT	1970	1460	164	97	3000K
DJ001.1188.840.A000 PX4089763	15	SH MAT	2030	1500	169	100	4000K
DJ002.1188.830.A000 PX4089749	21	SH MAT	2730	2020	152	96	3000K
DJ002.1188.840.A000 PX4089770	21	SH MAT	2810	2080	156	99	4000K
DJ003.1188.830.A000 PX4089756	29	SH MAT	3720	2750	143	95	3000K
DJ003.1188.840.A000 PX4089777	29	SH MAT	3820	2830	147	98	4000K

## DIMENSIONS

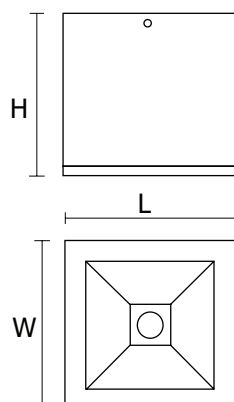

L [mm]	W [mm]	H [mm]
169	169	165

L = Length | W = Width | H = Height / Depth