

Torino IP54 LED



TORINO IP54 LED is a luminaire characterized by good luminous parameters, quick installation and a uniform luminance on the surface of the diffuser.

Materials: powder painted steel sheet body (standard colour: white). OPAL and microprismatic (MPRM) diffusers

Installation: surface mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFORMATION

Colour	White
--------	-------

CERTIFICATES

Degree of protection (IP)	IP54
Class of protection	I
CE	Yes
HACCP+	Yes

LIGHT DATA


Light colour	White
Color rendering index	84
Light distribution	Wide beam
Light distribution	DI
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Operating temperature range [°C]
CQ001.1111.830.A000 PX3760729	21	OPAL	2700	129	3000K	-20 ... 40
CQ001.1111.840.A000 PX3760736	21	OPAL	2790	133	4000K	-20 ... 40
CQ002.1111.830.A000 PX3760743	30	OPAL	3780	126	3000K	-20 ... 40
CQ002.1111.840.A000 PX3760750	30	OPAL	3900	130	4000K	-20 ... 40
CQ003.1111.830.A000 PX3760757	21	OPAL	2740	130	3000K	-20 ... 40
CQ003.1111.840.A000 PX3760764	21	OPAL	2820	134	4000K	-20 ... 40
CQ004.1111.830.A000 PX3760771	30	OPAL	3820	127	3000K	-20 ... 40

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Operating temperature range [°C]
CQ004.1111.840.A000 PX3760778	30	OPAL	3940	131	4000K	-20 ... 40
CQ001.1122.830.A000 PX3760849	21	MPRM	2980	142	3000K	-10 ... 35
CQ001.1122.840.A000 PX3760855	21	MPRM	3070	146	4000K	-10 ... 35
CQ002.1122.830.A000 PX3760861	30	MPRM	4170	139	3000K	-10 ... 35
CQ002.1122.840.A000 PX3760867	30	MPRM	4300	143	4000K	-10 ... 35
CQ003.1122.830.A000 PX3760873	21	MPRM	3000	143	3000K	-10 ... 35
CQ003.1122.840.A000 PX3760879	21	MPRM	3100	148	4000K	-10 ... 35
CQ004.1122.830.A000 PX3760885	30	MPRM	4200	140	3000K	-10 ... 35
CQ004.1122.840.A000 PX3760891	30	MPRM	4340	145	4000K	-10 ... 35

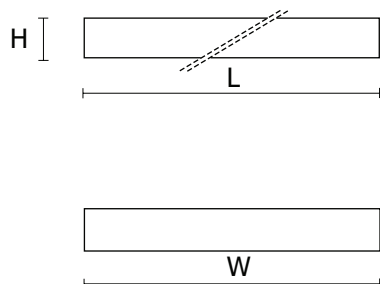

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
CQ001.1111.830.A000 PX3760729	595	595	65
CQ001.1111.840.A000 PX3760736	595	595	65
CQ002.1111.830.A000 PX3760743	595	595	65
CQ002.1111.840.A000 PX3760750	595	595	65
CQ003.1111.830.A000 PX3760757	1195	295	65
CQ003.1111.840.A000 PX3760764	1195	295	65
CQ004.1111.830.A000 PX3760771	1195	295	65
CQ004.1111.840.A000 PX3760778	1195	295	65
CQ001.1122.830.A000 PX3760849	595	595	65
CQ001.1122.840.A000 PX3760855	595	595	65
CQ002.1122.830.A000 PX3760861	595	595	65
CQ002.1122.840.A000 PX3760867	595	595	65
CQ003.1122.830.A000 PX3760873	1195	295	65
CQ003.1122.840.A000 PX3760879	1195	295	65
CQ004.1122.830.A000 PX3760885	1195	295	65
CQ004.1122.840.A000 PX3760891	1195	295	65

L = Length | W = Width | H = Height / Depth

