

ONTEC S20  
ONTEC S (25)  
ONTEC S30



universal luminaires, IP65/IP67

evacuation route direction (evacuation sign)  
anti-panic lighting, escape route lighting



#### PARAMETERS

- » Luminaire with high IP and IK (**IP65/IP67** and **IK08/IK10**) dedicated to industrial and office area
- » **COLD versions available** – without additional heating elements – low temperature tolerance, perfectly fit to warehouses and garages
- » **Universal products:**
  - » M – open space area (anti panic light),
  - » C version – evacuation route lighting (corridor lens) optimal up to 7 m high,
  - » F version – evacuation route light (corridor lens) above 7 m high,
  - » W version – fire protection points and exit doors illumination,
  - » evacuation route directions (both wall and ceiling installation).
- » Wide range of accessories which provide various options for mounting of luminaire
- » **Easy and quick installation using the IN/OUT connection - ONTEC S20 and S30**
- » Dimensions L x W x H [± 2 mm]:
  - » ONTEC S20 - 227 x 40 x 120
  - » ONTEC S (25) - 269 x 40 x 144
  - » ONTEC S30 - 327 x 40 x 170

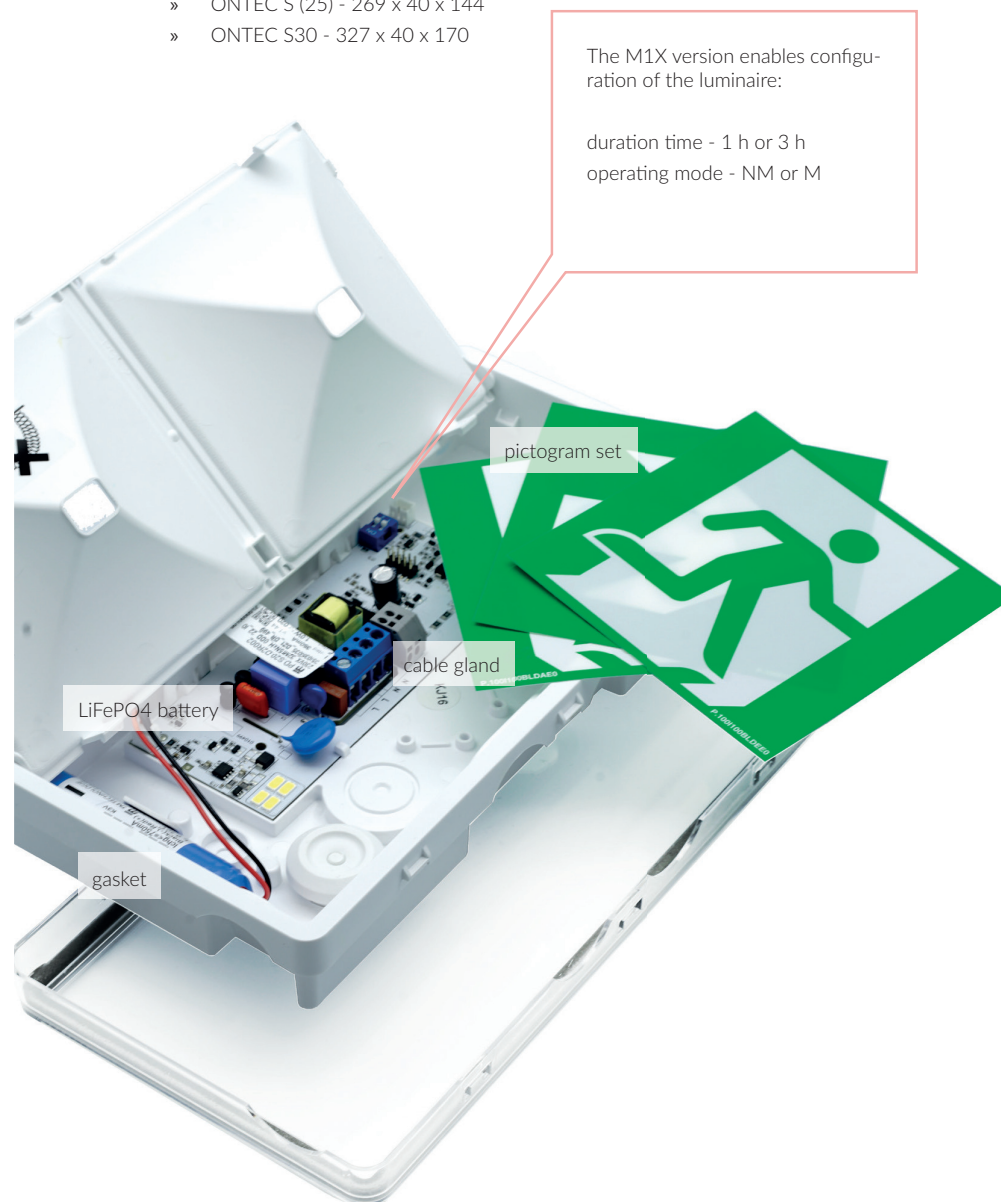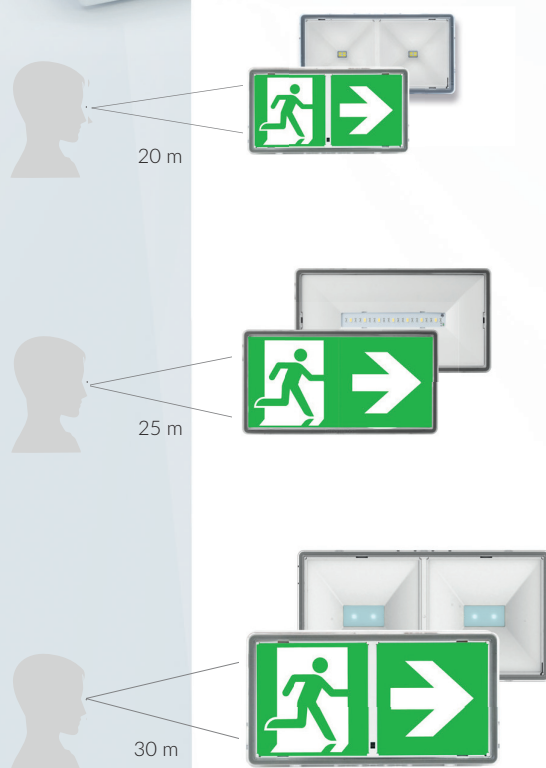





The M1X version enables configuration of the luminaire:

duration time - 1 h or 3 h  
operating mode - NM or M

ONTEC S + frame IP67

## VERSIONS

- » Anti-panic lighting, escape route lighting, lighting of the final exit / fire-protection devices



ONTEC S20



ONTEC S



ONTEC S30



ONTEC S



ONTEC S30



ONTEC S



ONTEC S30



ONTEC S

- » Evacuation route direction (evacuation sign)
  - » on the ceiling - using a flag with sticky pictograms
  - » on the wall - with the use of pictograms in the set

## ASSEMBLY

standard



additional options



recessed



diffuser



suspended



IK10  
protective cover




adjustable



pictogram set



IP67  
protective frame



metal frame

