

REPLAY

COLORI DISPONIBILI Available colors
Argento RAL 9006 RAL 9006 Silver

3

MADE IN ITALY

IP66

⏚

CE

IK 05

0,113 m²

ta 35 +45

⚽


D

SPD

DALI

3 ANNI WARRANTY

APPARECCHI INDUSTRIALI INDUSTRIAL LUMINAIRE

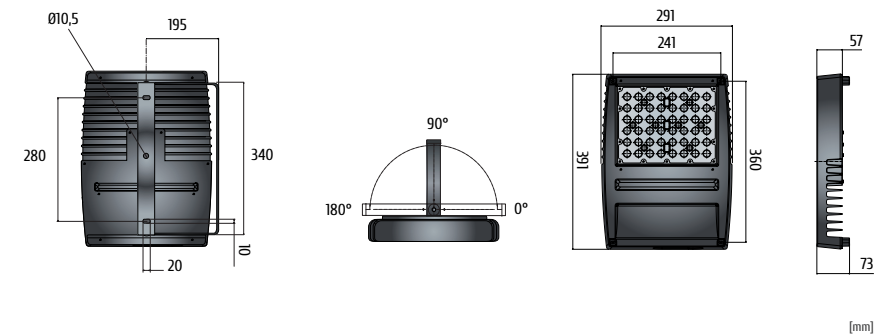

(mm)

Industrial watertight projector, extremely compact, ideal for industrial environments, warehouses, sports facilities, swimming pools and production areas.

Main Body: die-cast aluminum.

Upper cover: sturdy sheet steel.

Painting: thermosetting polyester powder, prior degreasing and phosphochromatizing process that will ensure an extremely high resistance to chemical and atmospheric agents.

Protection diffuser and lenses: transparent methacrilate, satin finish details (PMMA), 90° and 120° beam.

LED: Samsung LH508A, CRI>80, CCT 4000K.

Expected lifetime: 74,000h L80 B10 @ta25; 58,000h L80 B20 @tamax.

Power supply: 198-264V 50-60Hz with electronic ballast, surge protection up to 6/8Kv, fast plug waterproof connector.


Mounting system: direct to ceiling.

Available on request:


- 1-3h maintained emergency hit;
- wall/ceiling rotating bracket;
- SPD 10Kv;
- protection grid;
- CCT 3000K, 5000K;
- customized LEDs current driving.




	CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	CORRENTE Current(mA)	SPD Spd(Kv)	APERTURA FASCIO Beam angle(°)	PESO NETTO Net weight(Kg)	
120°	227643.024	36 LED LH508A	99W	16950	14747	700	6	120	7,23	
	227643.036	36 LED LH508A	138W	21450	18662	950	6	120	7,23	
	227643.048	48 LED LH508A	184W	28600	24882	950	8	120	8,18	
90°	228643.024	36 LED LH508A	99W	16950	15255	700	6	90	7,26	
	228643.036	36 LED LH508A	138W	21450	19305	950	6	90	7,26	
	228643.048	48 LED LH508A	184W	28600	25740	950	8	90	8,11	
AS 55°	229643.024	36 LED LH508A	99W	16950	14628	700	6	AS 55	7,30	
	229643.036	36 LED LH508A	138W	21450	18511	950	6	AS 55	7,30	
	229643.048	48 LED LH508A	184W	28600	24682	950	8	AS 55	8,24	
	code + DALI	Driver dimmerabile DALI DALI dimmable driver								
	code + 01	Kit emergenza 1h 1h Emergency kit								
	code + 03	Kit emergenza 3h 3h Emergency kit								
	922701.000	Staffa di rotazione Rotating bracket								1,14
	922700.001	Griglia di protezione Protection grid								0,14
	922700.002	Telaio da incasso Built-in frame								3,80
	900000.000	SPD 10Kv								0,05



Replay 36 LED 120° 21450lm



Replay 36 LED 90° 16950lm



Replay 48 LED AS 55° 28600lm

m³ 0,015
430x315x110mm


1 Pcs
60 pcs

REPLAY

Accessori - Accessories




● Telaio da Incasso
Built-in frame
922700.002

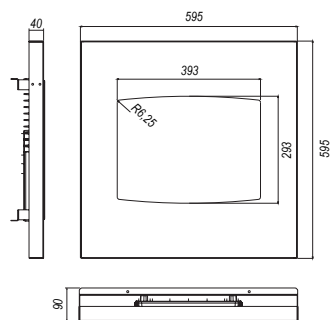

● Kit di emergenza SA
Maintained emergency kit



● Staffa di rotazione
Rotation bracket
922701.000



● Griglia di protezione
Protection grid
922700.001

