

nuudo.

Arcano

Arcano

MODULAR PERFECTION

De Arcano serie is een modulair 48V DC systeem met stuk voor stuk krachtig design. Door de brede opzet van mogelijkheden, rails in inbouw, opbouw en pendel zijn deze toepasbaar in elke ruimte. De Arcano zorgt met het design en veelzijdigheid dat licht in elke ruimte tot zijn recht komt.

The Arcano is a modular 48V DC track system in black and white. You can get the track as a built-in, surface-mounted and suspended version. Anywhere in the track, various products can be placed. We have downlights for direct light, downlights opal for general lighting, directional spotlights in different sizes and light outputs and we have pendant luminaires in the shape of a tube and a sphere, the sphere version can be tilted.

The system is suitable for retail, hospitality and residential or office environments where a homey/welcoming feeling is important.




Versatility Whiteh light



Arcano


SURFACE MOUNTED TRACK

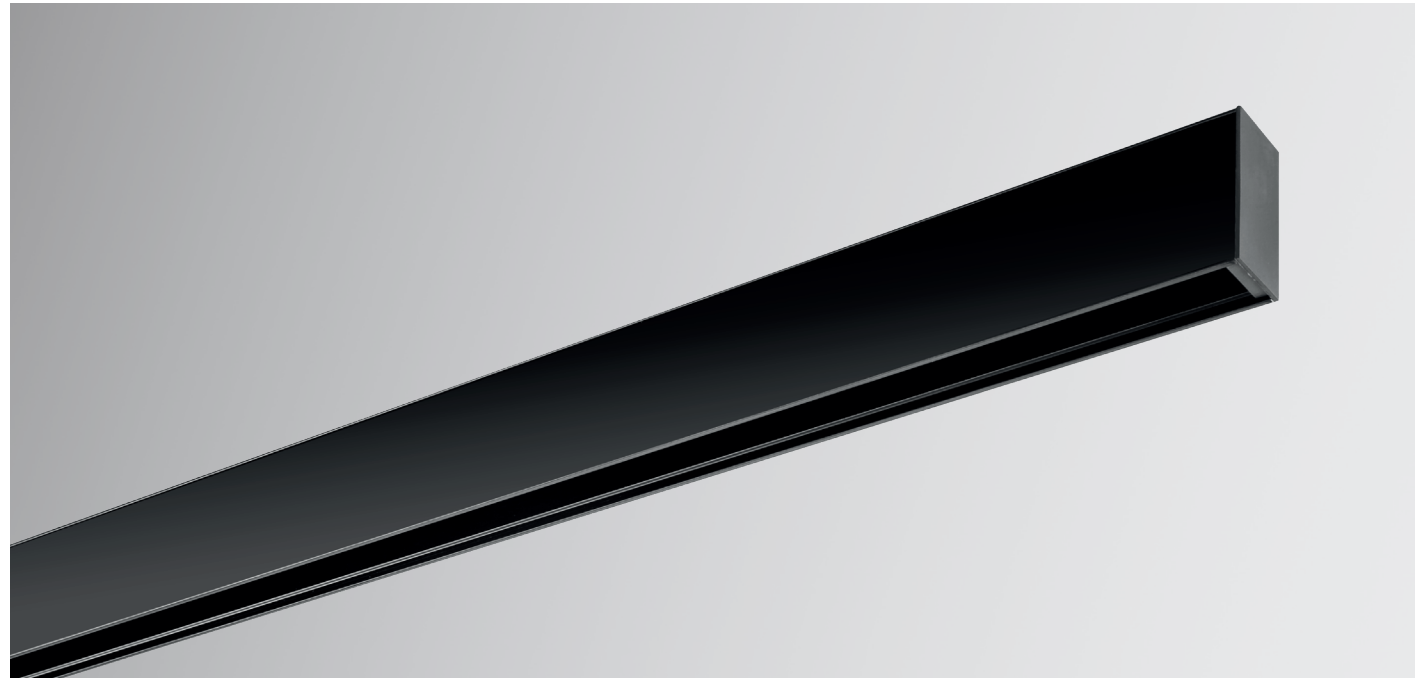


Product information

Input voltage	DC48V
Max. load	up to 450W
Max. track length	up to 20m
Track sections	1m / 2m / 3m
Available color	White / Black
Certification	CE / ROHS

Dimensions

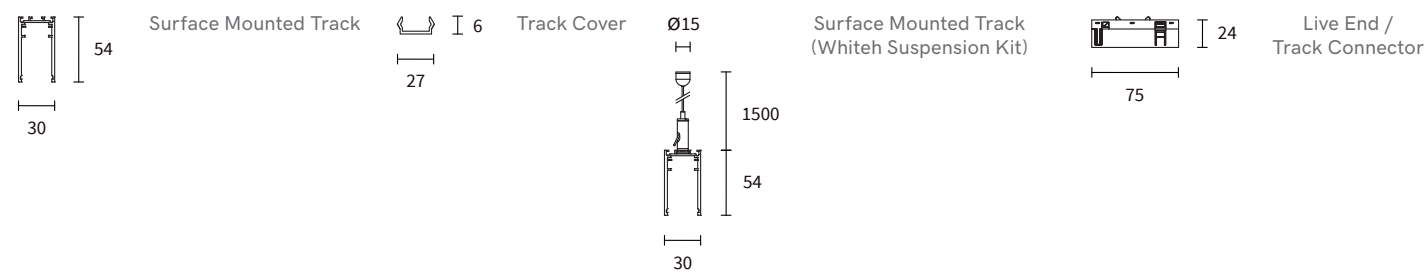

Track Accessories | Available for surface mounted track

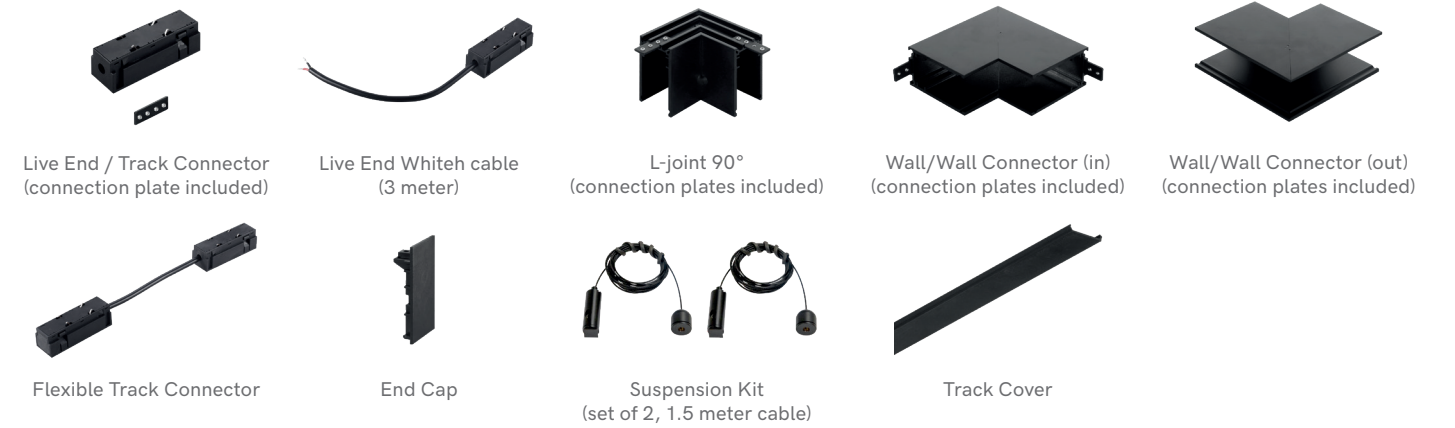

Track

Article No.	Product Name	Color	Voltage	Length
1.09.0032	Arcano Surface Mounted Track	White	DC48V	1 meter
1.09.0033	Arcano Surface Mounted Track	Black	DC48V	1 meter
1.09.0034	Arcano Surface Mounted Track	White	DC48V	2 meter
1.09.0035	Arcano Surface Mounted Track	Black	DC48V	2 meter
1.09.0036	Arcano Surface Mounted Track	White	DC48V	3 meter
1.09.0037	Arcano Surface Mounted Track	Black	DC48V	3 meter


Track Accessories

Article No.	Product Name	Color	Length
1.01.0262	Live end / Track Connector (connection plate included)	Black	
1.01.0263	Live end White cable	Black	3 meter
1.01.0256	L-joint 90° for Arcano Surface Mounted Track	White	
1.01.0257	L-joint 90° for Arcano Surface Mounted Track	Black	
1.01.0258	Wall/Wall Connector (in) for Arcano Surface Mounted Track (connection plates included)	White	
1.01.0259	Wall/Wall Connector (in) for Arcano Surface Mounted Track (connection plates included)	Black	
1.01.0260	Wall/Wall Connector (out) for Arcano Surface Mounted Track (connection plates included)	White	
1.01.0261	Wall/Wall Connector (out) for Arcano Surface Mounted Track (connection plates included)	Black	
1.01.0272	Flexible Track Connector	White	
1.01.0273	Flexible Track Connector	Black	
1.01.0270	End Cap	White	
1.01.0271	End Cap	Black	
1.01.0274	Suspension Kit for Arcano Surface Mounted Track (set of 2)	Nickel	1.5 meter
1.01.0275	Suspension Kit for Arcano Surface Mounted Track (set of 2)	Black	1.5 meter
1.01.0264	Track Cover	White	1 meter
1.01.0265	Track Cover	Black	1 meter
1.01.0266	Track Cover	White	2 meter
1.01.0267	Track Cover	Black	2 meter
1.01.0268	Track Cover	White	3 meter
1.01.0269	Track Cover	Black	3 meter


Arcano

SURFACE MOUNTED TRACK INSTALLATION

Square installation

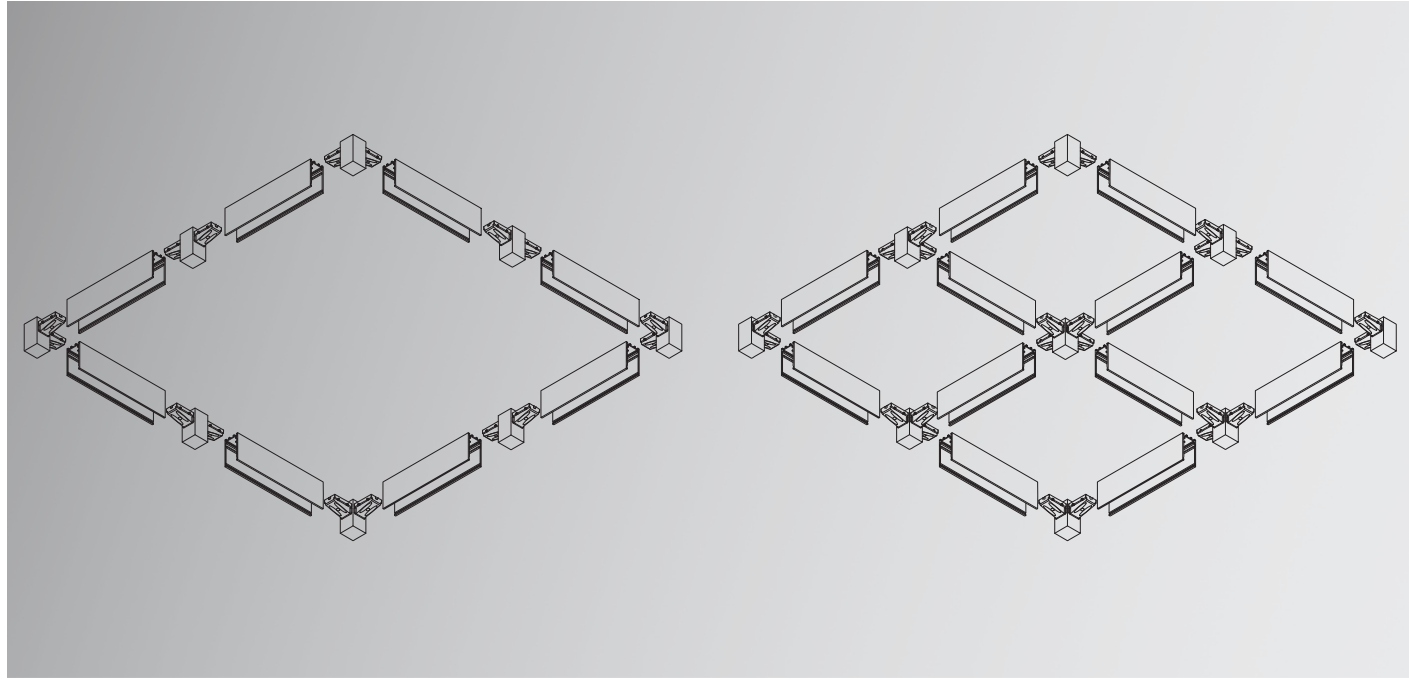

Hexagonal installation

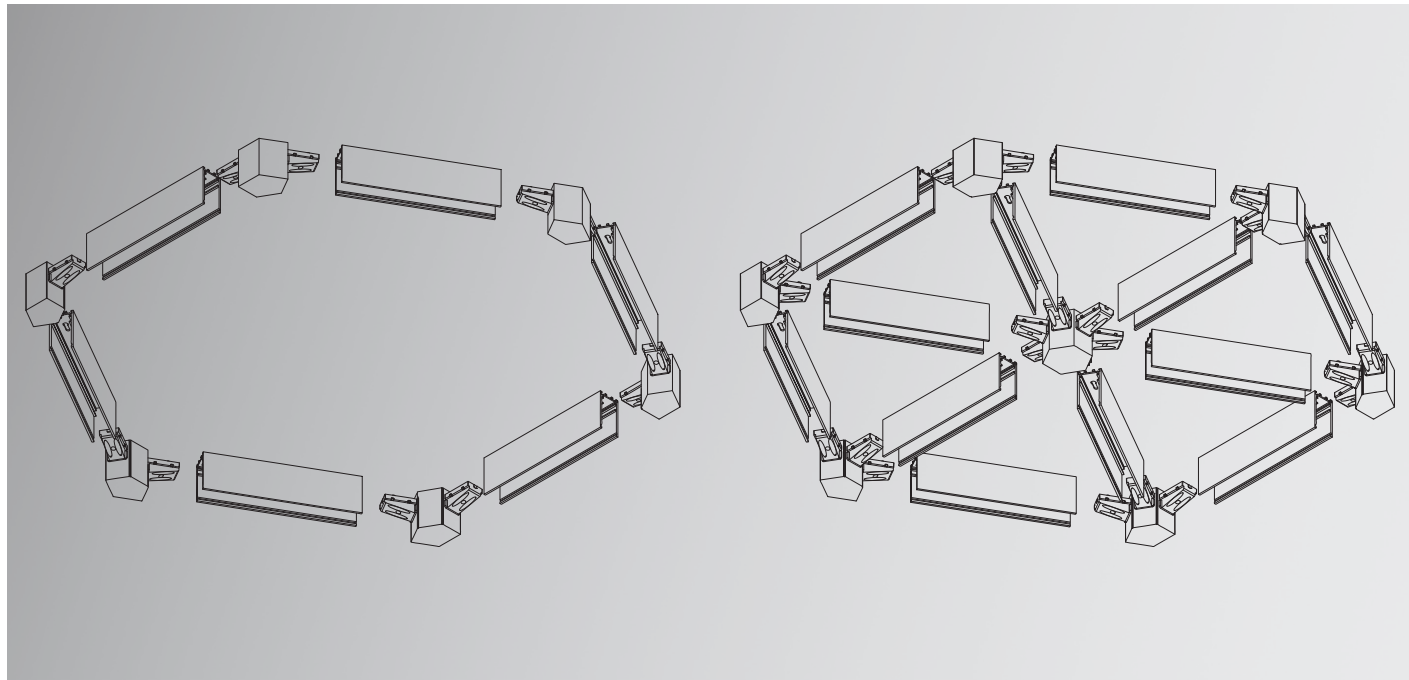

Track Parts | Suitable for square installation



L-joint 90°



Connector



T-splitter
(left / right)




X-joint

Track Parts

Article No.	Product Name	Color	Article No.	Product Name	Color
1.01.0289	L-joint 90°	White	1.01.0303	T-splitter (right)	White
1.01.0290	L-joint 90°	Black	1.01.0304	T-splitter (right)	Black
1.01.0295	Connector	White	1.01.0297	X-joint	White
1.01.0296	Connector	Black	1.01.0298	X-joint	Black
1.01.0301	T-splitter (left)	White			
1.01.0302	T-splitter (left)	Black			

Dimensions

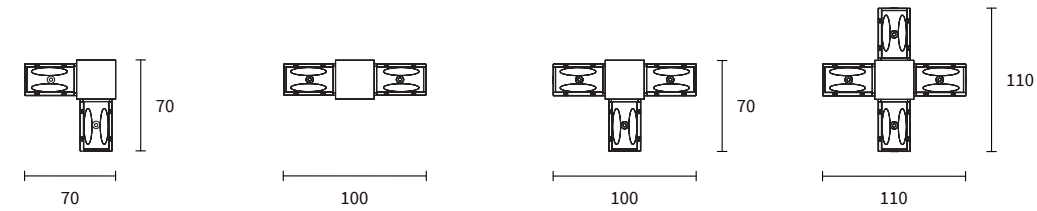

Track Parts | Suitable for hexagonal installation



Corner Piece 2-fold



Connector



Corner Piece 3-fold




Center Piece


Track Parts

Article No.	Product Name	Color	Article No.	Product Name	Color
1.01.0291	Corner Piece 2-fold	White	1.01.0293	Corner Piece 3-fold	White
1.01.0292	Corner Piece 2-fold	Black	1.01.0294	Corner Piece 3-fold	Black
1.01.0295	Connector	White	1.01.0299	Center Piece	White
1.01.0296	Connector	Black	1.01.0300	Center Piece	Black

Dimensions

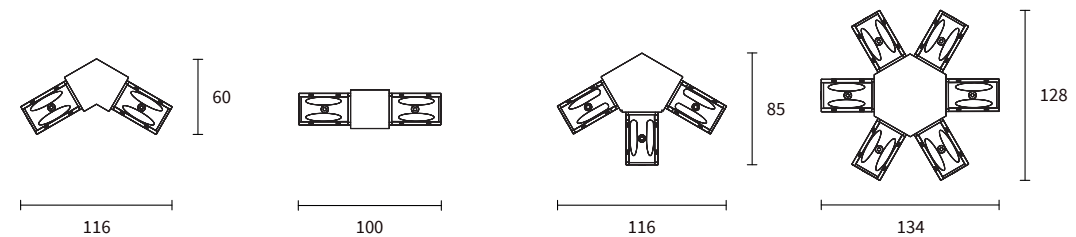


Arcano RECESSED TRACK

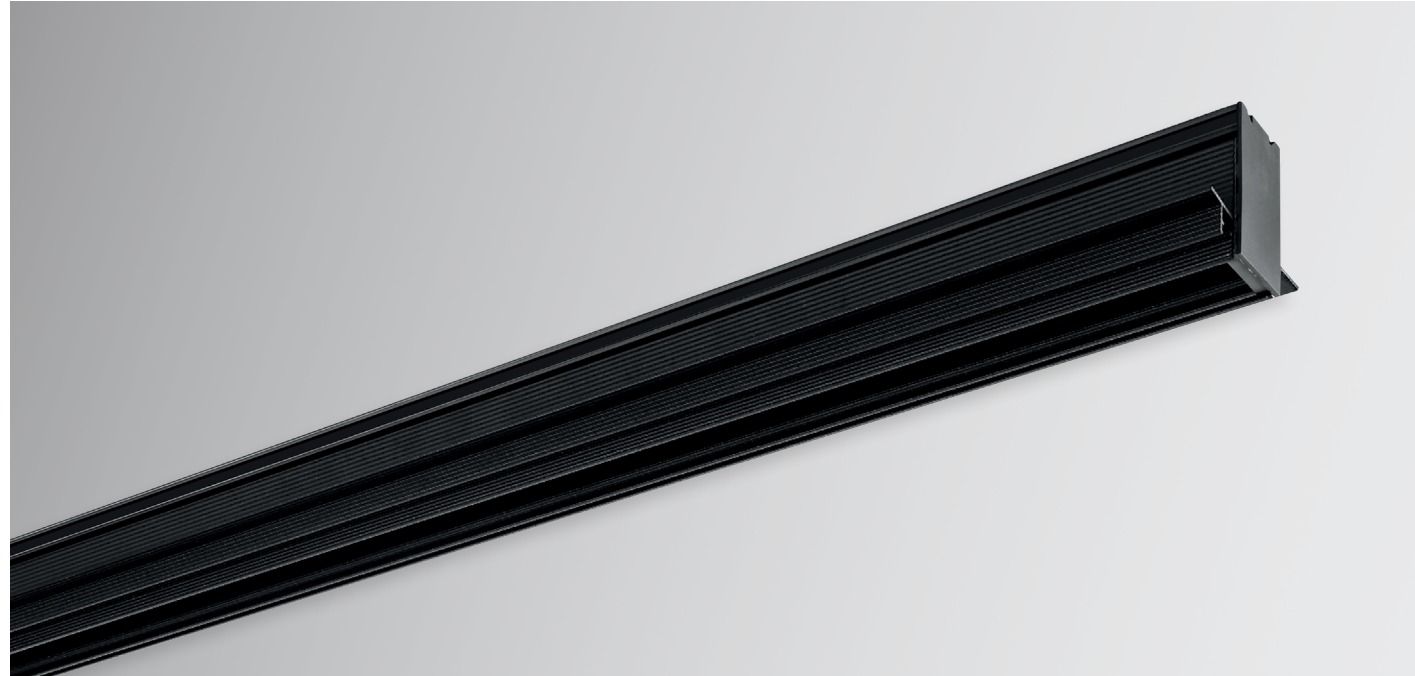


Product information

Input voltage	DC48V
Max. load	up to 450W
Max. track length	up to 20m
Track sections	1m / 3m
Available color	White / Black
Certification	CE / ROHS

Dimensions

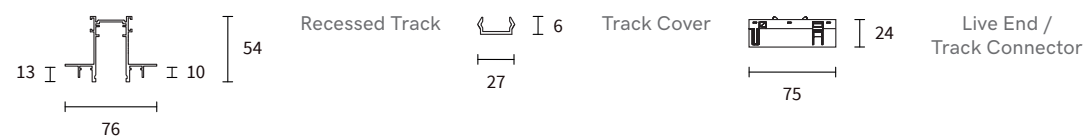

Track accessories | Available for recessed track

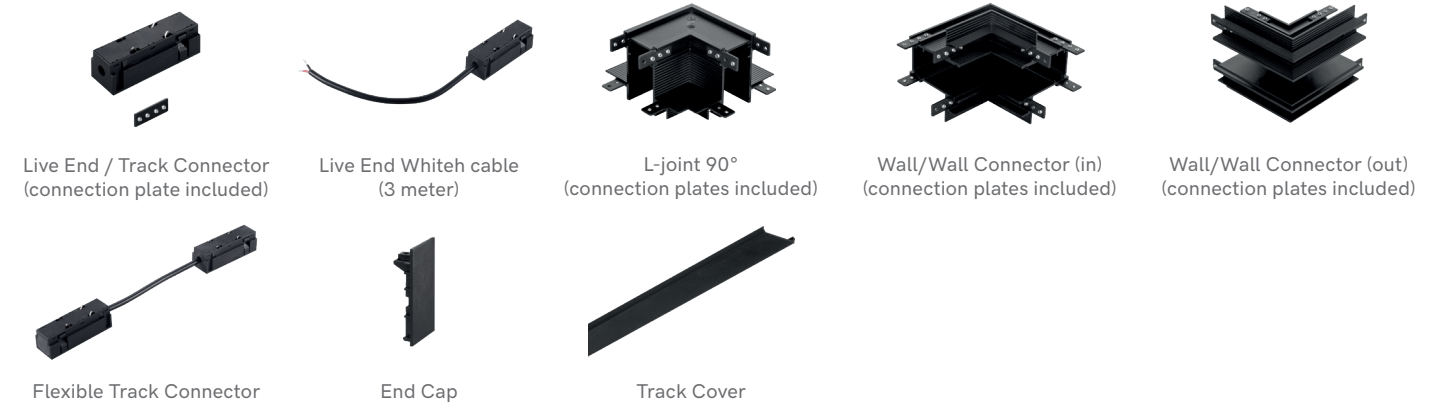

Track

Article No.	Product Name	Color	Voltage	Length
1.09.0038	Arcano Recessed Track	White	DC48V	1 meter
1.09.0039	Arcano Recessed Track	Black	DC48V	1 meter
1.09.0040	Arcano Recessed Track	White	DC48V	2 meter
1.09.0041	Arcano Recessed Track	Black	DC48V	2 meter
1.09.0042	Arcano Recessed Track	White	DC48V	3 meter
1.09.0043	Arcano Recessed Track	Black	DC48V	3 meter


Track Accessories

Article No.	Product Name	Color	Length
1.01.0262	Live End / Track Connector (connection plate included)	Black	
1.01.0263	Live End White cable	Black	3 meter
1.01.0277	L-joint 90° for Arcano Recessed Track	White	
1.01.0278	L-joint 90° for Arcano Recessed Track	Black	
1.01.0279	Wall/Wall Connector (in) for Arcano Recessed Track (connection plates included)	White	
1.01.0280	Wall/Wall Connector (in) for Arcano Recessed Track (connection plates included)	Black	
1.01.0281	Wall/Wall Connector (out) for Arcano Recessed Track (connection plates included)	White	
1.01.0282	Wall/Wall Connector (out) for Arcano Recessed Track (connection plates included)	Black	
1.01.0272	Flexible Track Connector	White	
1.01.0273	Flexible Track Connector	Black	
1.01.0270	End Cap	White	
1.01.0271	End Cap	Black	
1.01.0264	Track Cover	White	1 meter
1.01.0265	Track Cover	Black	1 meter
1.01.0266	Track Cover	White	2 meter
1.01.0267	Track Cover	Black	2 meter
1.01.0268	Track Cover	White	3 meter
1.01.0269	Track Cover	Black	3 meter



Arcano

ADJUSTABLE TRACK LIGHTS

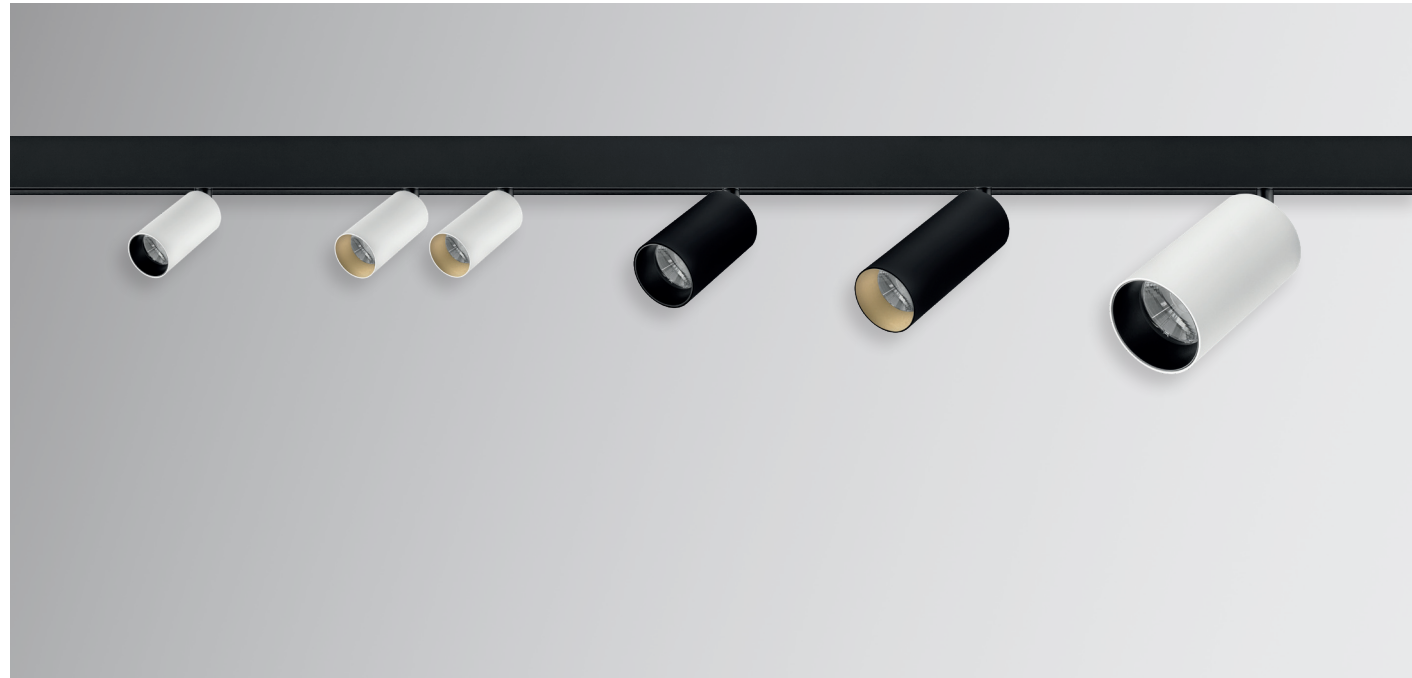


powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	up to 30W
Lumen output	up to 2250lm
Efficiency	up to 64lm / W
CRI	>90Ra
Lens	30° for Ø30 (included) 30° for Ø52 / Ø75 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

Dimensions

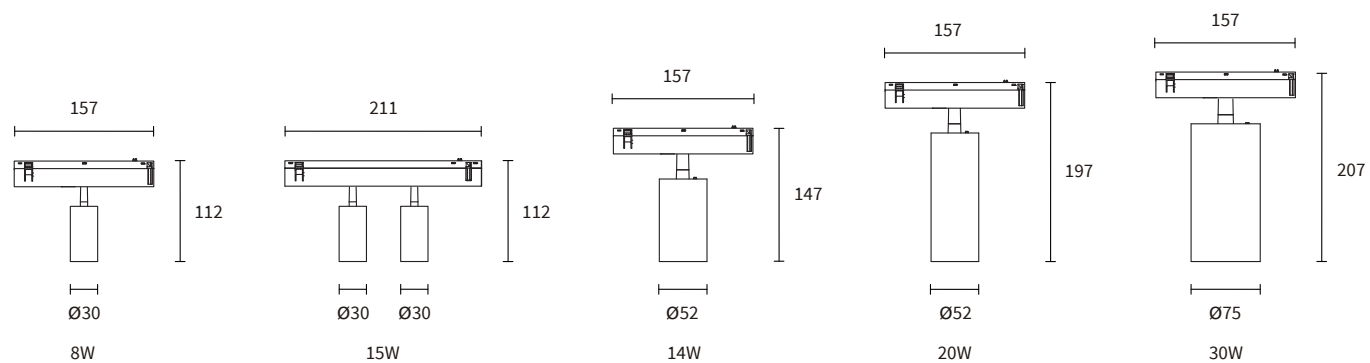

Adjustable Track Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3015 / 2.17.3039*	Spotty Mini	Ø30 mm	401lm	White	2700K	>90Ra	Passive	8W	30°
2.17.3016 / 2.17.3040*	Spotty Mini	Ø30 mm	401lm	Black	2700K	>90Ra	Passive	8W	30°
2.17.3017 / 2.17.3041*	Spotty Mini	Ø30 mm	446lm	White	3000K	>90Ra	Passive	8W	30°
2.17.3018 / 2.17.3042*	Spotty Mini	Ø30 mm	446lm	Black	3000K	>90Ra	Passive	8W	30°
2.17.3031 / 2.17.3055*	Spotty Mini 2-Lights	Ø30 mm	750lm	White	2700K	>90Ra	Passive	15W	30°
2.17.3032 / 2.17.3056*	Spotty Mini 2-Lights	Ø30 mm	750lm	Black	2700K	>90Ra	Passive	15W	30°
2.17.3033 / 2.17.3057*	Spotty Mini 2-Lights	Ø30 mm	830lm	White	3000K	>90Ra	Passive	15W	30°
2.17.3034 / 2.17.3058*	Spotty Mini 2-Lights	Ø30 mm	830lm	Black	3000K	>90Ra	Passive	15W	30°
2.17.3019 / 2.17.3043*	Spotty Medium	Ø52 mm	782lm	White	2700K	>90Ra	Passive	14W	30°
2.17.3020 / 2.17.3044*	Spotty Medium	Ø52 mm	782lm	Black	2700K	>90Ra	Passive	14W	30°
2.17.3021 / 2.17.3045*	Spotty Medium	Ø52 mm	838lm	White	3000K	>90Ra	Passive	14W	30°
2.17.3022 / 2.17.3046*	Spotty Medium	Ø52 mm	838lm	Black	3000K	>90Ra	Passive	14W	30°
2.17.3023 / 2.17.3047*	Spotty Medium LH	Ø52 mm	1150lm	White	2700K	>90Ra	Passive	20W	30°
2.17.3024 / 2.17.3048*	Spotty Medium LH	Ø52 mm	1150lm	Black	2700K	>90Ra	Passive	20W	30°
2.17.3025 / 2.17.3049*	Spotty Medium LH	Ø52 mm	1236lm	White	3000K	>90Ra	Passive	20W	30°
2.17.3026 / 2.17.3050*	Spotty Medium LH	Ø52 mm	1236lm	Black	3000K	>90Ra	Passive	20W	30°
2.17.3029 / 2.17.3053*	Spotty Maxi	Ø75 mm	2250lm	White	3000K	>90Ra	Passive	30W	30°
2.17.3030 / 2.17.3054*	Spotty Maxi	Ø75 mm	2250lm	Black	3000K	>90Ra	Passive	30W	30°

Article No. White* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

Adjustable Track Lights Accessories

Article No.	Product Name	Article No.	Product Name
2.01.1084	Golden Inner Ring for Spotty Mini Ø30 mm	5.14.0246	Lens 50° for Spotty Mini Ø30 mm
2.01.1086	Golden Inner Ring for Spotty Medium Ø52 mm	5.14.0247	Lens 15° for Spotty Medium Ø52 mm
2.01.1088	Golden Inner Ring for Spotty Maxi Ø75 mm	5.14.0249	Lens 50° for Spotty Medium Ø52 mm
2.01.1152	Honeycomb Louvre for Spotty Medium Ø52 mm	5.14.0250	Lens 15° for Spotty Maxi Ø75 mm
2.01.1153	Honeycomb Louvre for Spotty Maxi Ø75 mm	5.14.0252	Lens 50° for Spotty Maxi Ø75 mm

Track Lights Accessories

Available for Ø30 / Ø52 / Ø75 mm tracklights.




50° Lens
for Ø30



15° / 50° Lens
for Ø52 / Ø75



Honeycomb
for Ø52 / Ø75



Golden Inner Ring
for Ø30 / Ø52 / Ø75

Arcano

FIXED TRACK LIGHTS




powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	4W
Lumen output	up to 265lm
Efficiency	up to 66lm / W
CRI	>90Ra
Lens	30° for Ø22 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

Dimensions



Ø22 Ø22


Fixed Track Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3035 / 2.17.3059*	Tuby Mini 2-Lights	Ø22 mm	265lm	White	2700K	>90Ra	Passive	4W	30°
2.17.3036 / 2.17.3060*	Tuby Mini 2-Lights	Ø22 mm	265lm	Black	2700K	>90Ra	Passive	4W	30°
2.17.3037 / 2.17.3061*	Tuby Mini 2-Lights	Ø22 mm	265lm	White	3000K	>90Ra	Passive	4W	30°
2.17.3038 / 2.17.3062*	Tuby Mini 2-Lights	Ø22 mm	265lm	Black	3000K	>90Ra	Passive	4W	30°

Article No. Whiteh * indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

Arcano

LINEAR LIGHT (LENS COVER)

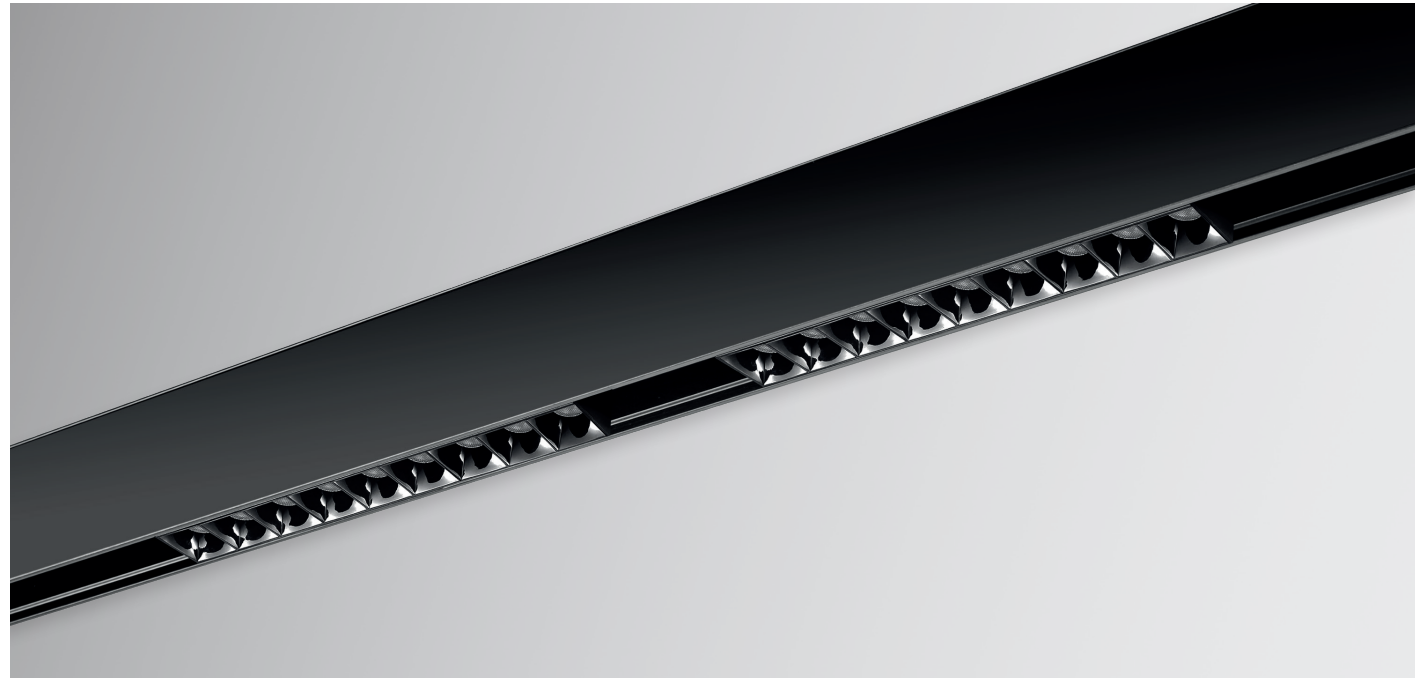

powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	12W
Lumen output	up to 1047lm
Efficiency	up to 87lm / W
CRI	>90Ra
Lens	24°
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS


Linear Light (Lens Cover) | 12W

Article No.	Product Name	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3003 / 2.17.3009*	Arcano Linear Light 9-LED	948lm	Black	2700K	>90Ra	Passive	12W	24°
2.17.3004 / 2.17.3010*	Arcano Linear Light 9-LED	1047lm	Black	3000K	>90Ra	Passive	12W	24°

Article No. Whiteh * indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

Linear Light (Lens Cover) | 12W

Dimensions

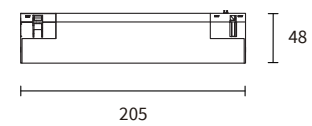

Arcano

TILTABLE LINEAR LIGHT (LENS COVER)



powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	11W
Lumen output	up to 1047lm
Efficiency	up to 87lm / W
CRI	>90Ra
Lens	24°
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS


Tilttable Linear Light (Lens Cover) | 11W

Article No.	Product Name	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.17.3005 / 2.17.3011*	Arcano Linear Light 9-LED Tilttable	948lm	White	2700K	>90Ra	Passive	11W	24°
2.17.3006 / 2.17.3012*	Arcano Linear Light 9-LED Tilttable	948lm	Black	2700K	>90Ra	Passive	11W	24°
2.17.3007 / 2.17.3013*	Arcano Linear Light 9-LED Tilttable	1047lm	White	3000K	>90Ra	Passive	11W	24°
2.17.3008 / 2.17.3014*	Arcano Linear Light 9-LED Tilttable	1047lm	Black	3000K	>90Ra	Passive	11W	24°

Article No. Whiteh * indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.


Tilttable Linear Light (Lens Cover) | 11W

Dimensions

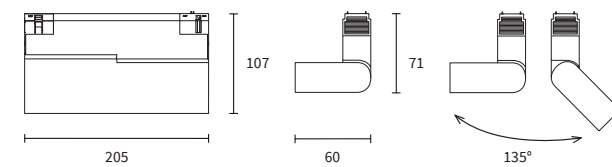

Arcano

LINEAR LIGHT (OPAL COVER)

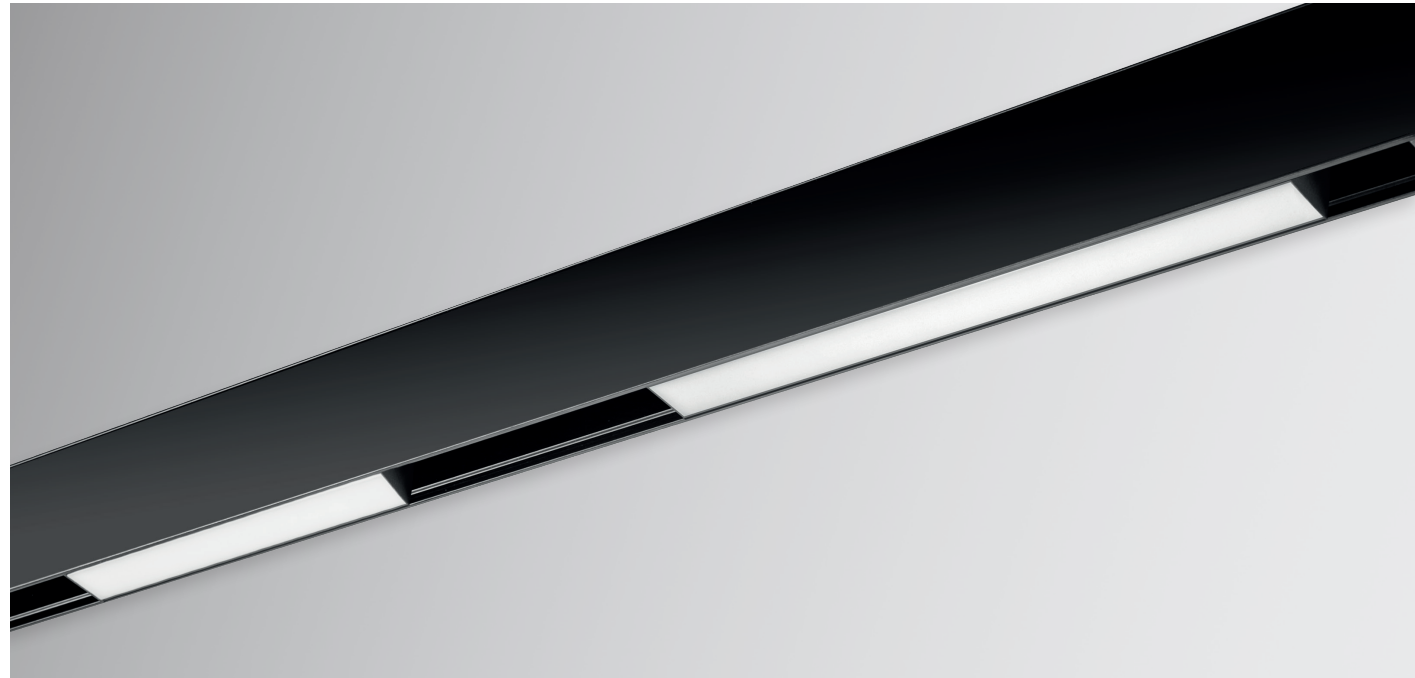


powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	up to 18W
Lumen output	up to 1382lm
Efficiency	up to 77lm / W
CRI	>80Ra
Beam angle	110°
CCT	2700K / 3000K
Available color	Black
Certification	CE / ROHS

Linear Light (Opal Cover) | 6W / 11W / 18W

Dimensions

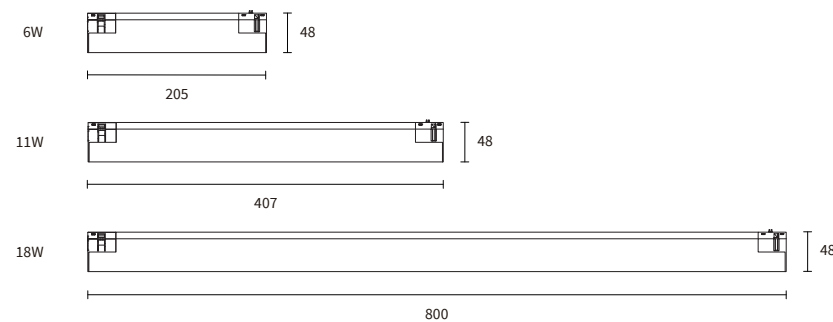

Linear Light (Opal Cover)

Article No.	Product Name	Lumen	Housing Color	CCT	CRI	Cooling	Power	Cover
2.17.2991 / 2.17.2997*	Arcano Linear Light	375lm	Black	2700K	>80Ra	Passive	6W	Opal
2.17.2992 / 2.17.2998*	Arcano Linear Light	385lm	Black	3000K	>80Ra	Passive	6W	Opal
2.17.2993 / 2.17.2999*	Arcano Linear Light	676lm	Black	2700K	>80Ra	Passive	11W	Opal
2.17.2994 / 2.17.3000*	Arcano Linear Light	782lm	Black	3000K	>80Ra	Passive	11W	Opal
2.17.2995 / 2.17.3001*	Arcano Linear Light	1340lm	Black	2700K	>80Ra	Passive	18W	Opal
2.17.2996 / 2.17.3002*	Arcano Linear Light	1382lm	Black	3000K	>80Ra	Passive	18W	Opal

Article No. White* indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.



Arcano

PENDANT TRACK LIGHTS




powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	up to 19W
Lumen output	up to 1219lm
Efficiency	up to 64lm / W
CRI	>90Ra
Lens	30° for Ø30 (included) 30° for Ø52 (included)
CCT	2700K / 3000K
Available color	White / Black
Certification	CE / ROHS

Dimensions

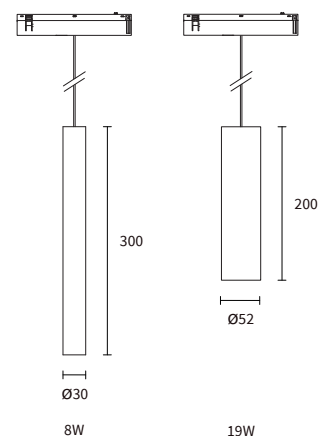

Cable: 2.5m included
Cable can be shortened
to desired length.

8W 19W

Pendant Track Lights

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Lens
2.06.0815 / 2.06.0831*	Arcano Pendant Track Mini LH	Ø30 mm	267lm	White	2700K	>90Ra	Passive	8W	30°
2.06.0816 / 2.06.0832*	Arcano Pendant Track Mini LH	Ø30 mm	267lm	Black	2700K	>90Ra	Passive	8W	30°
2.06.0817 / 2.06.0833*	Arcano Pendant Track Mini LH	Ø30 mm	312lm	White	3000K	>90Ra	Passive	8W	30°
2.06.0818 / 2.06.0834*	Arcano Pendant Track Mini LH	Ø30 mm	312lm	Black	3000K	>90Ra	Passive	8W	30°
2.06.0819 / 2.06.0835*	Arcano Pendant Track Medium	Ø52 mm	1134lm	White	2700K	>90Ra	Passive	19W	30°
2.06.0820 / 2.06.0836*	Arcano Pendant Track Medium	Ø52 mm	1134lm	Black	2700K	>90Ra	Passive	19W	30°
2.06.0821 / 2.06.0837*	Arcano Pendant Track Medium	Ø52 mm	1219lm	White	3000K	>90Ra	Passive	19W	30°
2.06.0822 / 2.06.0838*	Arcano Pendant Track Medium	Ø52 mm	1219lm	Black	3000K	>90Ra	Passive	19W	30°

Article No. Whiteh * indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

Pendant Track Lights Accessories

Article No.	Product Name
2.01.1084	Golden Inner Ring for Arcano Pendant Track Mini LH Ø30 mm
2.01.1086	Golden Inner Ring for Arcano Pendant Track Medium Ø52 mm
5.14.0246	Lens 50° for Arcano Pendant Track Mini LH Ø30 mm
5.14.0247	Lens 15° for Arcano Pendant Track Medium Ø52 mm
5.14.0249	Lens 50° for Arcano Pendant Track Medium Ø52 mm


Pendant Track Lights Accessories | Available for Ø30 / Ø52 Pendant Track Lights



50° Lens
for Ø30



15° / 50° Lens
for Ø52



Golden inner ring
for Ø30 / Ø52

Arcano PENDANT BALL TRACK LIGHT




powered by
TRIDONIC

Product information

Input voltage	DC48V
Power	28W
Lumen output	up to 2181lm
Efficiency	up to 78lm / W
CRI	>90Ra
Cover	Opal
CCT	2700K / 3000K
Available color	Black
Certification	CE / ROHS

Dimensions

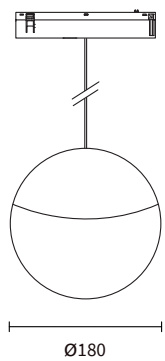

Cable: 2.5m
Cable can be shortened
to desired length.

Tilttable



Pendant Ball Track Light

Article No.	Product Name	Diameter	Lumen	Housing Color	CCT	CRI	Cooling	Power	Cover
2.06.0800 / 2.06.0808*	Arcano Pendant Ball Track Light	Ø180 mm	2140lm	Black	2700K	>90Ra	Passive	28W	Opal
2.06.0802 / 2.06.0810*	Arcano Pendant Ball Track Light	Ø180 mm	2181lm	Black	3000K	>90Ra	Passive	28W	Opal


Article No. Whiteh * indicates that the luminaire is DALI Dimmable. Please use the DALI driver on page 35.

Arcano

IN-TRACK & REMOTE DRIVERS

In-Track Driver (300 cm cable included) | 75-150W

Dimensions

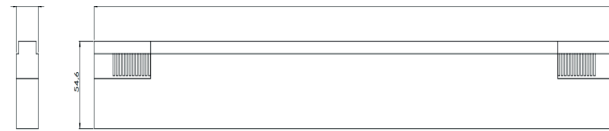

Arcano In-Track-Driver


Article No.	Product Name	Input Voltage	Output Voltage	Output Power	Housing Color
3.10.0779	LED Driver In-track CV Arcano DALI	230 AC	48V DC	Max. 150W	White
3.10.0783	LED Driver In-track CV Arcano CASAMBI	230 AC	48V DC	Max. 150W	White
3.10.0830	LED Driver In-track CV Arcano	230 AC	48V DC	Max. 150W	White
3.10.0780	LED Driver In-track CV Arcano DALI	230 AC	48V DC	Max. 150W	Black
3.10.0784	LED Driver In-track CV Arcano CASAMBI	230 AC	48V DC	Max. 150W	Black
3.10.0831	LED Driver In-track CV Arcano	230 AC	48V DC	Max. 150W	Black
3.10.0777	LED Driver In-track CV Arcano DALI	230 AC	48V DC	Max. 75W	White
3.10.0781	LED Driver In-track CV Arcano CASAMBI	230 AC	48V DC	Max. 75W	White
3.10.0828	LED Driver In-track CV Arcano	230 AC	48V DC	Max. 75W	White
3.10.0778	LED Driver In-track CV Arcano DALI	230 AC	48V DC	Max. 75W	Black
3.10.0782	LED Driver In-track CV Arcano CASAMBI	230 AC	48V DC	Max. 75W	Black
3.10.0829	LED Driver In-track CV Arcano	230 AC	48V DC	Max. 75W	Black

Product information

Input voltage	230V AC
Output voltage	48V DC
Power	Max. 450W (DALI max. 150W)
Available color	Black / Aluminium
Certification	CE / ROHS

In-Track Driver (300 cm cable included) | 100W

Dimensions

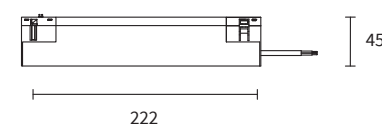

Arcano In-Track-Driver

Article No.	Product Name	Input Voltage	Output Voltage	Output Power	Housing Color
3.10.0607	LED Driver CV Arcano 48V DC 100W Cable 300cm	230 AC	48V DC	Max. 100W	Black
3.10.0638	LED Driver In-track CV Arcano 48V DC 100W White	230 AC	48V DC	Max. 100W	White

Remote Drivers (30cm cable included) | up to 450W

Dimensions




	A	B	C
75W	180	36	63
100W	199	36	63
150W	219	36	63
300W	246	40	77
480W	262	44	125
600W	280	49	144

Arcano Remote-Drivers

Article No.	Product Name	Input Voltage	Output Voltage	Output Power	Housing Color
3.10.0608	LED Driver CV Arcano 48V DC 75W Cable 30cm	230 AC	48V DC	Max. 75W	Aluminium
3.10.0609	LED Driver CV Arcano 48V DC 100W Cable 30cm	230 AC	48V DC	Max. 100W	Aluminium
3.10.0610	LED Driver CV Arcano 48V DC 150W Cable 30cm	230 AC	48V DC	Max. 150W	Aluminium
3.10.0612	LED Driver CV Arcano 48V DC 300W Cable 30cm	230 AC	48V DC	Max. 300W	Aluminium
3.10.0613	LED Driver CV Arcano 48V DC 480W Cable 30cm	230 AC	48V DC	Max. 480W	Aluminium

DALI Dimmable Drivers | up to 150W

Dimensions

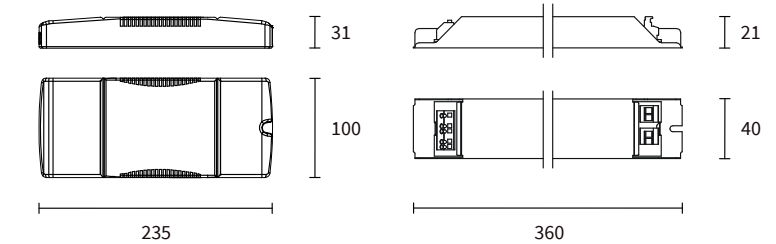

Arcano DALI Dimmable -Drivers

Article No.	Product Name	Input Voltage	Output Voltage	Output Power	DALI Current Draw	Housing Color
3.10.0687	LED Driver CV Arcano LCU 48V DC 75W	230 AC	48V DC	Max. 75W	2mA	White
3.10.0688	LED Driver CV Arcano LCU 48V DC 150W	230 AC	48V DC	Max. 150W	2mA	White
3.10.0689*	LED Driver CV Arcano LCU Linear 48V DC 75W	230 AC	48V DC	Max. 75W	2mA	White
3.10.0690*	LED Driver CV Arcano LCU Linear 48V DC 150W	230 AC	48V DC	Max. 150W	2mA	White

Article No. White* indicates an "open frame" Whiteout strain relief

DALI Control Unit



- Rated voltage AC 230 V ~
- DALI Output current max. 52mA
- Number of DALI subscribers max. 26
- Max. number of DALI Control Units is 1 x 3.10.0708 and 3 x 3.10.0707



- DALI current draw 2mA
- Max. number of DALI Control Units is 1 x 3.10.0708 and 3 x 3.10.0707

DALI Control Unit

Article No.	Product Name	Input Voltage	Output Current
3.10.0708	DALI Control Unit Whiteh intergrated DALI Power Supply	230 AC	Max. 52mA
3.10.0707*	DALI Control Unit	230 AC	-

Article No. White* in combination Whiteh 3.10.0708 as second control unit

CASAMBI

Casambi technology can be integrated into our nuudo. luminaires. Casambi enables remote control of lighting through an optimal bluetooth connection.

This smart lighting solution is ideal in terms of ease of installation and functionality with minimal additional hardware and deployment costs.



Article number	Description	Other
2.06.0909	Pendant Arcano In-track medium 52 Black 19W 2700K	1134lm CRI>90 30°, incl. driver GA Casambi incl. 2,5m cable Black
2.06.0935	Pendant Arcano Ball White 28W 2700K 2140lm CRI>90	incl. driver Casambi , incl. 2,5m cable Black
2.06.0936	Pendant Arcano Ball Black 28W 2700K 2140lm CRI>90	incl. driver Casambi , incl. 2,5m cable Black
2.06.0937	Pendant Arcano Ball White 28W 3000K 2181lm CRI>90	incl. driver Casambi , incl. 2,5m cable Black
2.06.0938	Pendant Arcano Ball Black 28W 3000K 2181lm CRI>90	incl. driver Casambi , incl. 2,5m cable Black
2.06.0939	Pendant Arcano Pendant mini 30 LH White 8W 2700K	267lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0940	Pendant Arcano Pendant mini 30 LH Black 8W 2700K	267lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0941	Pendant Arcano Pendant mini 30 LH White 8W 3000K	312lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0942	Pendant Arcano Pendant mini 30 LH Black 8W 3000K	312lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0943	Pendant Arcano Pendant mini 30 LH White 8W 2700K	267lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0944	Pendant Arcano Pendant mini 30 LH Black 8W 2700K	267lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0945	Pendant Arcano Pendant mini 30 LH White 8W 3000K	312lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0946	Pendant Arcano Pendant mini 30 LH Black 8W 3000K	312lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0947	Pendant Arcano Pendant medium 52 White 19W 2700K	1134lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0948	Pendant Arcano Pendant medium 52 Black 19W 2700K	1134lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0949	Pendant Arcano Pendant medium 52 White 19W 3000K	1219lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0950	Pendant Arcano Pendant medium 52 Black 19W 3000K	1219lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0951	Pendant Arcano Pendant medium 52 White 19W 2700K	1134lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0952	Pendant Arcano Pendant medium 52 Black 19W 2700K	1134lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0953	Pendant Arcano Pendant medium 52 White 19W 3000K	1219lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0954	Pendant Arcano Pendant medium 52 Black 19W 3000K	1219lm CRI>90 15° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0955	Pendant Arcano Pendant medium 52 White 19W 2700K	1134lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0956	Pendant Arcano Pendant medium 52 Black 19W 2700K	1134lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0957	Pendant Arcano Pendant medium 52 White 19W 3000K	1219lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0958	Pendant Arcano Pendant medium 52 Black 19W 3000K	1219lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black
2.06.0959	Pendant Arcano Pendant medium 52 White 19W 2700K	1134lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0960	Pendant Arcano Pendant medium 52 Black 19W 2700K	1134lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0961	Pendant Arcano Pendant medium 52 White 19W 3000K	1219lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap
2.06.0962	Pendant Arcano Pendant medium 52 Black 19W 3000K	1219lm CRI>90 50° incl. driver Casambi dimmable incl. 2,5m cable Black, incl. ceiling cap

Article number	Description	Other
2.17.4530	Lineair light Arcano Black 6W 2700K 375lm CRI>80	incl. driver Casambi dimmable, opal
2.17.4531	Lineair light Arcano Black 6W 3000K 385lm CRI>80	incl. driver Casambi dimmable, opal
2.17.4532	Lineair light Arcano Black 11W 2700K 676lm CRI>80	incl. driver Casambi dimmable, opal
2.17.4533	Lineair light Arcano Black 11W 3000K 782lm CRI>80	incl. driver Casambi dimmable, opal
2.17.4534	Lineair light Arcano Black 18W 2700K 1340lm CRI>80	incl. driver Casambi dimmable, opal
2.17.4535	Lineair light Arcano Black 18W 3000K 1382lm CRI>80	incl. driver Casambi dimmable, opal
2.17.4536	Lineair light Arcano 9-LED Black 12W 2700K 948lm	CRI>90 lens 24°, incl. driver Casambi dimmable
2.17.4537	Lineair light Arcano 9-LED Black 12W 3000K 1047lm	CRI>90 lens 24°, incl. driver Casambi dimmable
2.17.4538	Lineair light Arcano 9-LED kantelbaar White 12W	2700K 984lm CRI>90 lens 24°, incl. driver Casambi dimmable
2.17.4539	Lineair light Arcano 9-LED kantelbaar Black 12W	2700K 984lm CRI>90 lens 24°, incl. driver Casambi dimmable
2.17.4540	Lineair light Arcano 9-LED kantelbaar White 12W	3000K 1047lm CRI>90 lens 24°, incl. driver Casambi dimmable
2.17.4541	Lineair light Arcano 9-LED kantelbaar Black 12W	3000K 1047lm CRI>90 lens 24°, incl. driver Casambi dimmable
2.17.4542	Track spot Arcano Spotty mini 30 8W White 2700K 268lm	CRI>90 50° incl. driver Casambi dimmable
2.17.4543	Track spot Arcano Spotty mini 30 8W Black 2700K	268lm CRI>90 50° incl. driver Casambi dimmable
2.17.4544	Track spot Arcano Spotty mini 30 8W White 3000K 312lm	CRI>90 50° incl. driver Casambi dimmable
2.17.4545	Track spot Arcano Spotty mini 30 8W Black 3000K	312lm CRI>90 50° incl. driver Casambi dimmable
2.17.4546	Track spot Arcano Spotty mini 2-lights 30 15W White	2700K 1420lm CRI>90 50° incl. driver Casambi dimmable
2.17.4547	Track spot Arcano Spotty mini 2-lights 30 15W Black	2700K 1420lm CRI>90 50° incl. driver Casambi dimmable
2.17.4548	Track spot Arcano Spotty mini 2-lights 30 15W White	3000K 1420lm CRI>90 50° incl. driver Casambi dimmable
2.17.4549	Track spot Arcano Spotty mini 2-lights 30 15W Black	3000K 1420lm CRI>90 50° incl. driver Casambi dimmable
2.17.4550	Track spot Arcano Spotty medium 52 14W White 2700K	782lm CRI>90 15° incl. driver Casambi dimmable
2.17.4551	Track spot Arcano Spotty medium 52 14W Black 2700K	782lm CRI>90 15° incl. driver Casambi dimmable
2.17.4552	Track spot Arcano Spotty medium 52 14W White 3000K	838lm CRI>90 15° incl. driver Casambi dimmable
2.17.4553	Track spot Arcano Spotty medium 52 14W Black 3000K	838lm CRI>90 15° incl. driver Casambi dimmable
2.17.4554	Track spot Arcano Spotty medium 52 14W White 2700K	782lm CRI>90 50° incl. driver Casambi dimmable
2.17.4555	Track spot Arcano Spotty medium 52 14W Black 2700K	782lm CRI>90 50° incl. driver Casambi dimmable
2.17.4556	Track spot Arcano Spotty medium 52 14W White 3000K	838lm CRI>90 50° incl. driver Casambi dimmable
2.17.4557	Track spot Arcano Spotty medium 52 14W Black 3000K	838lm CRI>90 50° incl. driver Casambi dimmable

Article number	Description	Other
2.17.4558	Track spot Arcano Spotty medium 52 LH 19W White	1150lm CRI>90 15° incl. driver Casambi dimmable
2.17.4559	Track spot Arcano Spotty medium 52 LH 19W Black	2700K 1150lm CRI>90 15° incl. driver Casambi dimmable
2.17.4560	Track spot Arcano Spotty medium 52 LH 19W White 3000K	1236lm CRI>90 15° incl. driver Casambi dimmable
2.17.4561	Track spot Arcano Spotty medium 52 LH 19W Black	3000K 1236lm CRI>90 15° incl. driver Casambi dimmable
2.17.4562	Track spot Arcano Spotty medium 52 LH 19W White 2700K	1150lm CRI>90 50° incl. driver Casambi dimmable
2.17.4563	Track spot Arcano Spotty medium 52 LH 19W Black	2700K 1150lm CRI>90 50° incl. driver Casambi dimmable
2.17.4564	Track spot Arcano Spotty medium 52 LH 19W White 3000K	1236lm CRI>90 50° incl. driver Casambi dimmable
2.17.4565	Track spot Arcano Spotty medium 52 LH 19W Black	3000K 1236lm CRI>90 50° incl. driver Casambi dimmable
2.17.4566	Track spot Arcano Spotty maxi 75 35W White 2700K	2144lm CRI>90 15° incl. driver Casambi dimmable
2.17.4567	Track spot Arcano Spotty maxi 75 35W Black 2700K	2144lm CRI>90 15° incl. driver Casambi dimmable
2.17.4568	Track spot Arcano Spotty maxi 75 35W White 3000K	2250lm CRI>90 15° incl. driver Casambi dimmable
2.17.4569	Track spot Arcano Spotty maxi 75 35W Black 3000K	2250lm CRI>90 15° incl. driver Casambi dimmable
2.17.4570	Track spot Arcano Spotty maxi 75 35W White 2700K	2144lm CRI>90 50° incl. driver Casambi dimmable
2.17.4571	Track spot Arcano Spotty maxi 75 35W Black 2700K	2144lm CRI>90 50° incl. driver Casambi dimmable
2.17.4572	Track spot Arcano Spotty maxi 75 35W White 3000K	2250lm CRI>90 50° incl. driver Casambi dimmable
2.17.4573	Track spot Arcano Spotty maxi 75 35W Black 3000K	2250lm CRI>90 50° incl. driver Casambi dimmable
2.17.4574	Track spot Arcano Tuby mini 2-lights 30 4W White 2700K	265lm CRI>90 30° incl. driver Casambi dimmable
2.17.4575	Track spot Arcano Tuby mini 2-lights 30 4W Black	2700K 265lm CRI>90 30° incl. driver Casambi dimmable
2.17.4576	Track spot Arcano Tuby mini 2-lights 30 4W White 3000K	265lm CRI>90 30° incl. driver Casambi dimmable
2.17.4577	Track spot Arcano Tuby mini 2-lights 30 4W Black	3000K 265lm CRI>90 30° incl. driver Casambi dimmable
2.17.4593	Track spot Arcano Spotty medium 52 14W White 3000K	838lm CRI>90 30° incl. driver Casambi dimmable
2.17.4596	Track spot Arcano Spotty medium 52 14W White 2700K	782lm CRI>90 30° incl. driver Casambi dimmable
2.90.1112	Track spot Arcano Spotty medium 52 14W White 3000K	838lm CRI>90 50° incl. driver Casambi dimmable
2.90.1123	Track spot Arcano Spotty medium 52 14W White 2700K	782lm CRI>90 30° incl. driver Casambi dimmable
3.10.0781	LED Driver In-track CV Arcano 48V DC 75W White	Casambi, incl. cable 3m
3.10.0782	LED Driver In-track CV Arcano 48V DC 75W Black	Casambi, incl. cable 3m
3.10.0783	LED Driver In-track CV Arcano 48V DC 150W White	Casambi, incl. cable 3m
3.10.0784	LED Driver In-track CV Arcano 48V DC 150W Black	Casambi, incl. cable 3m

Credits

VISUALS imore.

GRAPHIC DESIGN Studio Anouk Stoffels

Nijverheidsweg 2

2421LR Nieuwkoop

+31 (0)172 574500

info@nuudo.com

www.nuudo.com

nuudo. is part of the Lumiparts Group