




Asymmetric LED

Luminaire is made of aluminum profile and characterized by asymmetric light distribution. ASYMMETRIC LED is perfect for illumination of blackboards, where designed reflector directs luminous flux directly on vertical surface.



BASIC INFORMATION

Materials: Powder painted aluminum profile. Transparent diffuser. The luminaire can be installed individually or combined into lighting lines with other Asymmetric LED or VIP LED luminaires.

Accessories: Suspensions (simple, electric)

Installation: surface mounted, suspended

Power: 220 ... 240

CATEGORIZATION:

Type of luminaire: Linear

Application: Office, Conference room, Corridor and staircase, Reception, Commercial premises, Lecture hall, Classroom

Mounting type: Ceiling mounted, Pendant



Technical data

MECHANICAL DATA

Housing material	Aluminum
Designed for light-line	yes

OPTICAL DATA

Louver/ diffuser	LNS
------------------	-----

ELECTRICAL DATA

Light source	LED
Luminaire power	19 - 73 W
Type of equipment	AC
Voltage rating	220 ... 240 V
Type of driver	DALI, ON/OFF
Emergency module	option
Motion sensor	option

LIGHT DATA

Luminaire luminous flux	2485 - 10435 lm
Luminaire's luminous efficacy	120 - 143 lm/W
Color rendering index	80, 90
Light distribution	DI
Lifetime L80B10 @25°C	100000 h
Lifetime L90B10 @25°C	64000 h
Colour temperature	3000K, 4000K
CRI & colour temperature	830, 840, 940

INFORMATION DATA

Net weight	1.5 - 4.4 kg
Colour	Black, Grey, White
Power and luminous flux tolerance	+/-10%

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	yes
CE	yes
HACCP+	yes
EAC	yes

Dimensions

L 575 mm, 1135 mm, 1695 mm, 2255 mm mm


W 65 mm mm

H 65 mm mm

L - Length

W - Width

H - Height / Depth

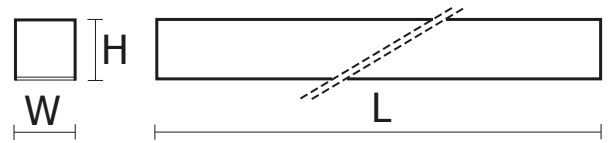

Accessories

ELECTRIC ELEMENTS



FS002.11.1500, FS002.11.3000,
FS002.11.4000, FS002.11.5000,
FS002.11.7000, FS002.33.1500,
FS002.33.3000, FS002.33.4000,
FS002.33.5000, FS002.33.7000,
FS002.22.1500, FS002.22.3000,
FS002.22.4000, FS002.22.5000,
FS002.22.7000

Electric suspension kit

INSTALLATION ELEMENTS



FS001.00.1500, FS001.00.3000,
FS001.00.4000, FS001.00.5000,
FS001.00.7000

Suspension kit 1x